



KA-2708 Magnetic Holder

- Attaching to any metallic surface
- Capacity: 6 Lbs
- Size: Disk diameter: 50mm
- Magnetic Power: 1200 gauss
- Weight: 75g





KA-2709 Quick-Release Magnetic Pick Up Tool

- A one-hand operation for pick-up and releasing nails, steel screws, nutetc any small parts.
- 9" Wide x 3-1/2" Diameter.
- Capacity: 5 Lbs.
- Ideal for cleaning-up around power equipment such as drill presses, milling machines and lathes.





- Features 1" steel tube frame for extra strength in heavy duty applications.
- Unique drop rail design allows greater shoulder and arm clearance.
- 1" thick padding on bed; 2" thick padding on headrest.
- Adjustable pneumatic headrest for maximum head comfort and shoulder support.
- Size: 1020 x 430 x180mm



KT-N0002 Plastic Creepers with 6 Wheels

- 40" ergonomically designed frame
- 6-3" swivel casters make it extremely maneuverable
- Vinyl covered foam head rest for maximum comfort
- Two small storage trays conveniently located on either side
- A low profile of 1" allows for greater clearance under vehicles



KA-6335



- Can opener: S2
- Chamfer tool: S2
- Sharpener: Grindstone
- Handle: ABS cover TPR
- Magnet: Permanent magnet

KA-6335 Magnetic Cap Opener

- L type can opener, easy for opening the paint can or milk can, also helpful for clearing the thorns in tires.
- With a small magnet in the handle that make the storage more convenient.
- Description: L:85mm, W:15mm



KA-J9002



KA-7841



Tyre Transport Dolly

- Dolly for transporting stacked car tyres and wheels.
- Designed for easy, one-person movement.
- Space saving for workshop.
- Labor saving and increases work efficiency.
- Dollies are stackable when not in use for easy storage.
- Heavy-Duty 3" casters including two brake casters make for smooth mobility and stability.





	KA-7841	KA-7841A	
Dimension	64 x 64 x 17.5cm	64 x 64 x 54.5cm	
Weight	5.5kgs	8.5kgs	
Loading Capacity	150kgs	150kg	
Caster 3"	Swivel caster x 2pcs Brake caster x 2pcs	Swivel caster x 2pcs Brake caster x 2pcs	





KA-1273 Saving Storage Container

Features:

- Patent design
- Stackable in use nest for compact storage
- Available in white PP or semi-clear PP for greater visibility
- Easy cleaning

Specification:

- Temperature range: -20 $^{\circ}$ C ~ 100 $^{\circ}$ C
- Dimension: 388 x 327 x 85mm
- Material: PP (Reinforced plastic material)





KA-1274



KA-1274W With wheel



Utility Carry Box KA-1274 KA-1274W

Features:

- With ruler mark in both metric & inch units
- Caster design(optional) provides great maneuverability
- Stackable and ergonomic design provides best flexibility

Specification:

- Dimension: 340 x 567 x 240mm
- Weight: 1366g / pc
- Material: PP (Reinforced plastic material)









Drum Plug Opener

- For removing and refitting fuel tank sender mounting rings
- The high quality tool makes jobs faster more precise

Model	Material	Dimension	Weight
KA-7253	Aluminum	315x115x40mm	525g
KA-7254	Aluminum	380x105x50mm	420g
KA-7255	Plastic	220x70x50mm	107g











KA-2444 Elastic Tow Rope

- Description: 7/8" 1.5M
- Breaking Cap: 2100kgs (4620lbs)



KA-1012 27pcs Knife & Scraper Set

Content:

1pc Knife with 0.6mm blade 1pc Scraper with 12mm blade

5pcs 12mm blade 5pcs 16mm blade

5pcs 16mm/53° blade

5pcs 20mm blade

5pcs 0.6mm blade




KA-1342 9" Tower Pincers



KA-1293 Snow Grabber Mat (2pcs/set)

- To escape from skid on snow or mud.
- Avoid shoveling and stress on your car's transmission, avoid tow costs and tiresome pushing.
- Simply put the mat under your car's drive wheel and go.
- Big size: a set of 2 sheets, per sheet of 60 x 23.5cm.
- Made of heavy duty polymer & cold resistance: -30°C
- For normal passenger cars use only.
- Grabber mat are both face claws.





Engine Stands

- Heavy-gauge steel tubing for strength and rigidity.
- Easy to disassemble for transporting or storage.
- Head with adjustable mounting arms attaches to engine block.
- Swivel head 360 ¢ X for easy accessibility.
- Slotted adjustable saddle permits quick and easy installation.
- Heavy-duty swivel 4 caster steel wheel for added stability.



KJ-M50750 Capacity: 750 LBS



KJ-M51000 Capacity: 1000 LBS



KJ-M51250 Capacity: 1250 LBS



KJ-M52000 Capacity: 2000 LBS



KJ-M52001 Heavy-Duty Capacity: 2000 LBS



KJ-M52002 Folding Type Capacity: 2000 LBS



Engine Crane (Hoist)

- Perfect for a variety of heavy duty applications.
- Heavy steel construction for maximum durability
- Features an 8ton detachable long ram
- Telescoping boom permits multiple length adjustment
- Smooth hydraulic lift operation
- Includes heavy steel hook with safety latch
- Large roller bearing wheels provide easy maneuvering
- Wide base for stability
- Easily disassembles for storage or transport
- Folds for easy storage or transport. Knock-down design reassembles in minutes



KJ-M71000

- Capacity: 1 Ton
- Min. ~ Max. Height: 0 ~ 2280mm



KJ-M71001

- Capacity: 1 Ton
- Min. ~ Max. Height: 200 ~ 1940mm



KJ-M72000

- Capacity: 2 Ton 2000 LBS
- Min. ~ Max. Height: 0 ~ 2520mm



KJ-M72001

- Capacity: 2 Ton
- Min. ~ Max. Height: 0 ~ 2360mm



KJ-M72002

- Capacity: 2 Ton
- Min. ~ Max. Height: 0 ~ 2340mm



KJ-M73000

- Capacity: 3 Ton
- Min. ~ Max. Height: 0 ~ 2200mm



Transmission Jack

- Foot operated for raising and lowering, release valve to give controlled lowering.
- Chrome plated rams and pump piston for prolonged seal life.
- Strong tubular construction and wide base provide greater stability.
- Fully adjustable saddle tits four ways.
- Two-stage telescoping design provides extra lifting range.
- Oil bypass system prevents the lifting ram from being over-pulled.
- Ball bearing casters with large 4i" diameter wheels allow smooth positioning and transporting.

Item No.	Capacity	Stroke Height (mm)
KJ-M8050A	0.5 Ton	820
KJ-M8050B	0.5 Ton	1ST Stage: 500 2ND Stage: 490
KJ-M8050CE	0.5 Ton	1ST Stage: 500 2ND Stage: 450
KJ-M8050D	0.5 Ton	1ST Stage: 490 2ND Stage:460

Item No.	Capacity	Stroke Height (mm)
KJ-M8050E	0.5 Ton	500
KJ-M8050F	0.5 Ton	1ST Stage: 510 2ND Stage:480
KJ-MTJ1000A	1 Ton	210~ 810
KJ-MTJ1000B	1 Ton	230~ 760

















KJ-MTJ1000A

KJ-MTJ1000B

Body and Frame Repair Kit



10 Tons Portable Power Master Set

KA-6069 Sing speed pump KA-6070 Two speed pump

1010010	Two speed pump		
Parts No.	Q'ty	Description	
210-01	1	Hydraulic pump	
210-02	1	Hose and couple	
210-03	1	10 ton ram 6" (152mm) stroke	
210-04	1	Spreader ram	
210-05	1	19" (482mm) extension tube	
210-06	1	14" (335mm) extension tube	
210-07	1	10" (254mm) extension tube	
210-08	1	5" (127mm) extension tube	
210-09	1	Male connector	
210-10	1	Flat base	
210-11	1	90°"V" base	
210-12	1	Wedge head	
210-13	1	Spreader plunger toe	
210-14	1	Spreader ram toe	
210-15	1	3-1/4" (83mm) flex haed	
210-17	1	Serrated saddle	
210-18	1	Metal box	



KA-6071 12 Ton 1/2" – 2" Hydraulic Pipe Bender

12 Ton hyd jack

FORMERS: #1 1/2"

#2 3/4"

#3 1"

#4 1-1/4"

#5 1-1/2"

#6 2"



KA-6193 Air Pump

- This air-power hydraulic pump is designed for using with single-acting cylinders and tools.
- Rugged construction and most components are made of aluminum alloy are built for long service life, easy operation and portability.
- Automatic overload relief setting as 10000 psi protects components in hydraulic system and work safely regardless of air pressure.
- New inlet & outlet design feature low exhausting air volume, non-noise effect and being operated in all directions.



KA-5558-G 7-IN-1 Multi-Function Tool Kit

- Scraper 16mm×185mm×75mm (CRV6150)
- 1 Slide Hammer Hook
- 2 Chisel 16mm×185mm×27mm(CRV6150)
- 3 -Rear Axle Bearing Puller
- Size: 1",1 $\frac{7}{8}$ ",1 $\frac{5}{16}$ ", 2 $\frac{3}{8}$ ", 1 $\frac{3}{8}$ ", 2 $\frac{7}{8}$ " (SCM 4140)



KA-5558-H 7-IN-1 Multi-Function Tool Kit

- 2 Chisel 16mm×185mm×27mm(CRV6150)
- 4 Bearing Hole Puller (SCM440)
 - Size: 10-14 mm 15-19 mm 18-25 mm 25-32 mm
- 1 Scraper 16mm×185mm x75mm(CRV6150)



KA-5558-J 3-IN-1 Multi-Function Tool Kit

$$1PC-\frac{11}{16}$$
" TIE ROD

$$1PC-\frac{15}{16}$$
 BALL JOINT

1PC-1
$$\frac{1}{8}$$
 " PITMAN ARM

Material: SCM45°



KA-5558-K 6-IN-1 Multi-Function Tool Kit

1-Scraper 16mm×185mm75mm(CRV6150) 2-Chisel 16mm×185mm×27mm(CRV6150)

1PC-
$$\frac{11}{16}$$
" TIE ROD (SCM45°)

$$1PC - \frac{15}{16}$$
 BALL JOINT (SCM45°)

1PC-1
$$\frac{1}{8}$$
" PITMAN ARM (SCM45°)Blow Case



KAO-30 Air Oil Pump

- Capacity: 30L
- Air Inlet Pressure:3~6KG/CM²
- Pressure Rate: 5:1
- Fluid Output Prsssure: 15~40KG/CM²
- Oil Out: 18L/min



KOC-60 Waste Oil Changer

■ Capacity: 60L

■ Pressure: 3~5kgs

■ Hose: 1/2"x2.5M

KOC-80 Waste Oil Changer CAPACITY: 80L



KAV-120N Vacuum Oil Extracting Machine

- Oil is extracted by the vacuum ejector, saving the troubles of repairing the pump or the motor. Cleaning the filter net is unnecessary. Either, Oil can be directly extracted without a lifter.
- It is suitable for all the vehicles either with or without an oil-draining hole under the chassis.
- The operation is easy and fast.
- It can be used to extract a variety of lubricant, gear oil, engine oil, gasoline oil, diesel oil, water and neutral liquid.
- Use the vacuum ejector to extract oil by air pressure. It can store pressure and extract or drain oil at any place.
- Capacity: 12L
- Machine Size: 285 x 250 x 860
- Hose:

A:6 φ x750L B:7 φ x750L D:7 φ x920L E:3/8" φ x650L F:Braking oil tube



Extracting oil is clearly visible



KA-120T Parts Washer With Turbo

- Capacity: 20 Gallons
- Solvent capacity: 12 Gallons
- Flow rate: 50 Gallons
- Packing:
 - 1 set/28kgs/ 30 kgs/5.5'

31-7/8"L x 20-7/8"W x 35-3/8"H



KA-130 Parts Washer

- Capacity: 30 Gallons
- Solvent capacity: 20 Gallons
- Flow rate: 50 Gallons
- Packing:
 - 1 set/34kgs/ 36 kgs/7'
- Size:

37-1/2"L x 21-1/4"W x 35-3/8"H



KA-140 Parts Washer

- Capacity: 40 Gallons
- Solvent capacity: 30 Gallons
- Flow rate: 50 Gallons
- Packing:
 - 1 set/42kgs/ 45 kgs/8'

45"L x 21-1/4"W x 35-3/8"H



KA-130A Air Power Parts Washer W/Turbo/Blower Gun

- Bucket Capacity: 30 Gallons
- Solvent capacity: 20 Gallons
- Flow rate: 75 Gallons
- Maximum speed: 11000prm
- Range of working pressure: 65-125PSI
- Air inlet port: 1/4"
- Packing:
- 1 set/34 kgs/36 kgs/7'
- Size:

37-1/2"L x 21-1/4"W x 35-3/8"H



KA-120A Air Power Parts Washer W/Turbo/Blower Gun

- Bucket Capacity: 20 Gallons
- Flow rate: 75 Gallons
- Solvent capacity: 12 Gallons Maximum speed: 11000prm
- Range of working pressure:
- 65-125PSI
- Air inlet port: 1/4"
- Packing: 1 set/28 kgs/30 kgs/ 5.5'

31-7/8"L x 20-7/8"W x 35-3/8"H



KA-140A Air Power Parts Washer W/Turbo/Blower Gun


- Bucket Capacity: 40 Gallons
- Flow rate: 75 Gallons
- Solvent capacity: 30 Gallons
- Maximum speed: 11000prm
- Range of working pressure: 65-125PSI
- Air inlet port: 1/4"
- Packing:
- 1 set/42 kgs/45 kgs/8'

45"L x 21-1/4"W x 35-3/8"H



KA-115H Deluxe Sand Blaster Cabinet (Floor type)

- Work capacity: 30 Gallons
- Range of blasting pressure: 65-125PSI
- Maximum pressure: 250PSI
- Hose size: Ø 1/2"
- Ceramic nozzle: Ø5, 6, 7mm





KA-103S Mini Portable Sand Blaster

- Tank capacity: 3 Gallons
- Tank diameter: 255mm
- Tank thickness: 0.3mm
- Tank material: Stainless
- Range of blasting pressure: 50-150 PSI





KA-103P Mini Portable Sand Blaster

- Tank capacity: 3 Gallons
- Tank diameter: 215mm
- Tank thickness: 2.0mmTank material: Plastic
- Range of blasting pressure: 50-150 PSI



KA-215A Sand Blaster

- Bucket material: LLDPE
- Bucket thickness: 5mm
- Bucket capacity: 5 Gallons
- Bucket Diameter: Ø 280mm
- Overall height: 700 mm
- Packing dimensions:
- 570(L) x 330(W) x 330(H) mm
- Measurement: 2.1 cuft
- Net weight: 5 kgs
- Gross weight: 6 kgs
- Nozzle: Ø 5, 6, 7mm



KA-215V

Vacuum Blaster

- Tank capacity: 5 Gallons
- Tank diameter: Ø280mm
- Tank thickness: 5mm
- Tank material: Plastic
- Range of blasting pressure: 62-125 PSI
- Air hose size: 3/8"
- Blast hose size: 1/2"
- Suction hose size: 1-1/4"
- Nozzle size: 5mm
- Net weight: 11kgs
- Gross weight: 12kgs
- Packing dimensions: 2.1

cuft



KA-250V Sand Dust Collector

- Tank capacity: 5 Gallons
- Tank diameter: Ø280mm
- Tank thickness: 5mm
- Tank material: Plastic
- Suction pressure: 62-125 PSI
- Max. flow rate: 24 CFM
- Air connector: 1/4"
- Suction hose size: 1-1/4"
- Net weight: 7kgs
- Gross weight: 8kgs
- Packing dimensions: 2.1 cuft



KA-01CP Electric Coolant Pump

- 1/15 HP motor drive
- Suitable for bench lathe, drill press, bench mill, tool grinder etc
- Magnetic base conveniently secure flexible nozzle to working machine surface
- 2 Gallons PE tank
- A valve for convenient flow on/off control
- Maximum coolant flow rate 22 I/min
- 1/4" dia. 8 feet long plastic hose
- Screen is removed easily for fast cleaning



KA-01NC Electric Coolant Pump


- Bucket capacity: 2 Gallons
- Suitable for bench lathe, drill press, bench mill, tool grinder etc
- Magnetic base conveniently secure flexible nozzle to working machine surface
- A valve for convenient flow on/off control
- Maximum coolant flow rate 18 l/min
- 1/4" dia. 8 feet long plastic hose
- Screen is removed easily for fast cleaning




KA-111 Hand-Held Sand Blaster

- Sand reservoir capacity: 1kgs (2.2 lbs)
- Ceramic nozzle diameter: Ø5 mm
- Air inlet size: 1/4 NPT
- Air source pressure: 60-125 PSI
- Working pressure: 90 PSI
- Air consumption: 5 CFM
- Air compressor horsepower: Over 1 HP
- No load weight: 0.6kgs
- Full load weight: 1.6kgs
- Applicable sand sizes: 16-180 grit



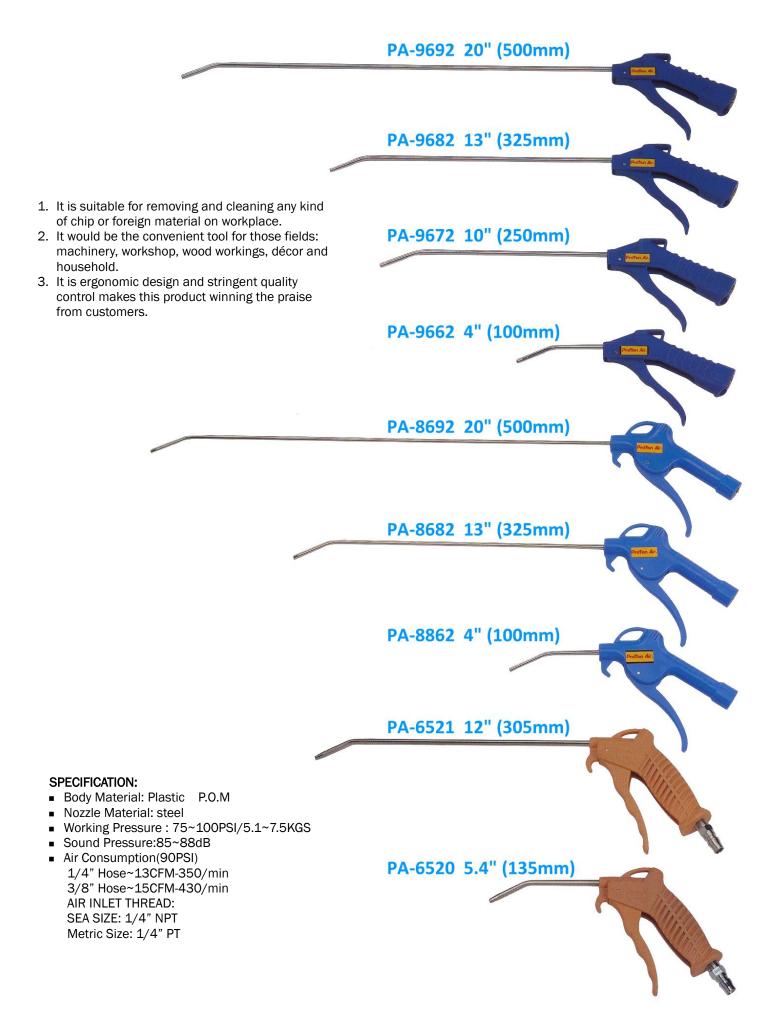







PA-2220 Extendable & Angles Swivel Air Blow Gun

- It is suitable for removing and cleaning any kind of chip or foreign material on workpiece.
- It would be the convenient tool for those fields: machinery, workshop, wood working, decor and household.
- It's ergonomic design and stringent quality control makes this product winning the praise customers.
- Short tube blow gun
- Long tuble blow gun
- Angle swivel blow gun
- Quick and easy setting for operation
- Adjustable length: 6 1/2" 11" (165mm-280mm)
- Tuble position switch knob


Swivel tube in all directions



Extending reach on narrow surface area dusting/cleaning



As well as dusting/cleaning on hard reaching area





PA-2102 4" Adjustable Air blow Gun



PA-9203 2 IN 1 Air Blow Gun



PA-9103 2 IN 1 Air Blow Gun

All item specification:

- Body material: plastic P.O.M
- Nozzle material: steel
- Working pressure: 75~110PSI / 5.1~7.5KGS
- Sound Pressure: 85~88dB
- Air consumption(90PSI)

1/4" Hose ~ 13 CFM - 350/min 3/8" Hose ~ 15 CFM - 430/min

Air inlet thread:

Sea size:1/4" NPT Metric size:1/4" PT Multi nations pat







Application: Auto Repair, Repair, Construction, Boat, Workshop, Industrial



KA-4150 1/2" Dr. Cordless Impact Wrench Set

- 18 V 1/2" Dr. Cordless Impact Wrench
- Professional charger (charge time: 1hr)
- Battery (Japan-made 2.0Ah Ni-Cd) OR (China-made 2.3Ah-Mh Battery)

Specification

- Voltage: 18V DC
- No-Load Speed: 0-1850 RPM MAX. Tightening Torque: 400 ft/lbs Tightening Torque: 300 ft/lbs
- Impact Per Minute: 2600 BPM
- Tool Weight: 3.0 KGS
- Capacity (SQ Dr.): 12.7±0.005mm
- Charging Time (Simple): 4-5 hr
- Charging Time (Professional): 1 hr
- Charging Voltage:
- Australia: 240V 50c/s, N.America: 115V 60c/s

- Japan:100V 50/60c/s, Europe:220V 50c/s

Optional Accessory:



KA-4150-1 **Professional Charger** Charging Time: 1 hr



KA-4150-2 Simple Charger Charging Time: 4-5 hr



KA-4151

Battery)

Description

2.3 Ah-MH Battery Made In China



KA-4150-4 2.0 Ah-Cd Battery Made In Japan

1/2" Dr. Cordless Impact Wrench Set

Battery (Japan-made 2.0Ah Ni-Cd) OR (China-made 2.3Ah-Mh

■ 18V High Torque 4100 kg/cm (300ft-lb) Heavy-Duty Impact

Compatible model Chicago Pneumatic CP8745, DEWALT

DW059K-2, Milwaukee 9079-20. Snap-On CT3850,



Ingersoll-Rand 2530K

18 Volt Cordless 2.3Ah Ni-MH

Nylon/ Glass Fiber & Aluminum Housing


An easy-to use forward/reverse switch

A Soft-touch variable speed switch

■ 18 V 1/2" Dr. Cordless Impact Wrench

Simplel charger (charge time: 4-5hr)





Color: black body with red flashing bulb

Wire length: 200cm

1pc double adhesive tape

Use for auto from 6 -15 V system



KA-1044 Auto Alarm Simulator

Size: 1.4 x 3.0cm

Black Body with red flashing bulb

Wire length: 200cm Double adhesive tape

Use for auto from 6 -15 V system







HBA-38 Reflectors Door Guard

No more scratched doors. Safety reflector. 3M super bright reflector with 3M double side adhesive tape. Soft material & 18mm thickness real protect car door.







HBA-37SD Stop-Block-Chock

- Dimensions: 40.5 x 20.5 x 12cm
- Capacity: 3 tons
- Do not use at unfirm surface






KA-7267 Flexible Funnel


- Flexible funnel provides easy job for draining or refilling wide kinds of fluid and oil.
- Suitable application: engine oil, coolant, brake oil, auto transmission oil...etc.
- Easy to bring anywhere, use to limited space and easy storage.
- Temperature range: -35°C and 105°C / -31°F and 221°F

Specification:

- Length: 372mm
- Width: 170mm
- Inside material: Aluminum
- Outside plastic material: NBR





Easy Storage & Clean





How to operation tool







Refill Pressure Sprayer

- Ideal for lubrication, paint, clean dust, antirust...etc.
- 2 function design for easy to operation.
- Long type nozzle suitable for narrow & difficult space spray.
- Refill pressure with universal adapter for easy to stuff air pressure.
- Provide with the safety valve on the air inlet set. Pre-setting 90psi (6.3bar)
- The exceed pressure will be release automatically.




Short type nozzle: Nebulization

Noticed: Keep out of reach of children.

Always wear eyes protection when operating or performing maintenance on this tool.

Do not use with strong chemical or corrosive fluid.

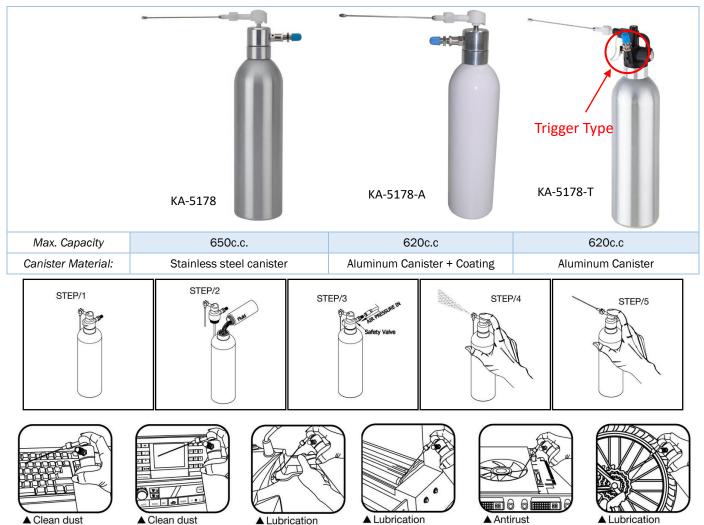



KA-2069 Parallel Welding Clamp (4pcs/set)

- Precise alignment of work piece in 'L', 'T', or 'l' configuration.
- Integral bubble level ensures accuracy of alignment.
- Wing bolts feature protective tips, preventing damage to surface of work piece.
- Effective, handy and easy to use.
- Material: Zinc alloy.







- Size: 605mmLWidth: 21mmBody: magnetic
- Specification: MM, Inch, R-angle

KA-2090 Magnetic Ruler

Sticks to magnetic metal surface measure irregular shape size flexible.

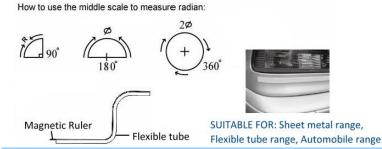



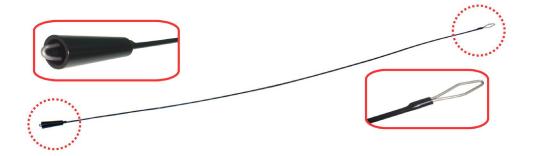

KA-3117 Length: 730mm KA-3117A Length: 1000mm KA-3117B Length: 1500mm

Wire Installer

Feature:


- Designed for quick and easy installation of wires.
- Convenient, Easy
- Suits for most wire installation work, (e.g. use in cars, trucks, motorcycles, plane, stereo systems, alarm systems, cellular phones, vacuum hoses, and air shock supply lines...etc)
- Eyelet shaped collet provides secure wire retention when threading wires. Will push or pull wires through openings.

Operation:

- (A) Thread about 1" of the wire/hose through the eyelet of this tool. Fold the wire/hose to the end of wire till parallel.
- (B) Slide the plastic cone collet up over the eyelet to lock in the wire.
- (C) For extremely confined areas, where the wire is too large to pass through. Thread about 1.5" of the wire/hose through the eyelet of this tool. Fold the wire/hose to the end of wire till parallel, then warp the wire with electrical tape in spiral motion.



- *Push and rotate the tool slowly when tool does not move smoothly through obstructed areas.
- *Please always disconnect vehicle power before using this tool.
- *Please always wear eye protection when using this tool.

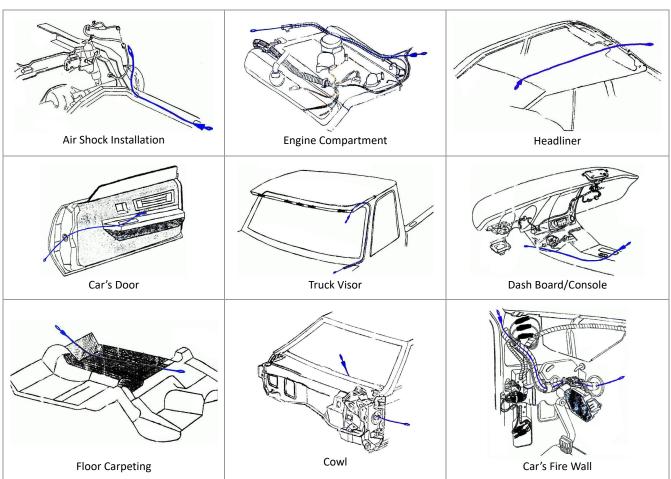





KA-KI472 Extra Heavy-Duty Grease Gun (Iron head)

- 1. Drop resistant steel head design with robust and durable construction
- 2. Working Pressure: up to 6,000 psi
- 3. Burst Pressure: 10,000 psi
- 4. Delivers Minimum: 1 oz. / 40 strokes
- 5. Loading way: 14 oz. Cartridge / 400c.c. Bulk / Dispenser.
- 6. Capacity: 14 oz. / 400c.c.
- 7. W/ Air Vent Valve & Filler Plug
- 8. W/ Black Grip



KA-KTPL479N Extra Heavy-Duty Twin Piston Grease Gun

- 1. Dual Piston with high volume performance
- 2. Working Pressure: up to 3,600 psi
- 3. Burst Pressure: 6,000 psi
- 4. Delivers Minimum: 3 oz. / 40 strokes
- Loading way: 14 oz. Cartridge / 400c.c. Bulk / Dispenser.
- 6. Capacity: 14 oz. / 400c.c.
- 7. W/ Air Vent Valve & Filler Plug
- 8. Variable Stroke: Available
- 9. W/ Black Tube Holder
- 10. W/ Black Grip





KA-A501 Oil Suction Gun

- Designed for all purpose quickly draining and filling device oil and other fluids for clutches, agricultural, and industrial chemical, additives, transmission on differentials, brake master cylinders, oil filters or other type of sumps or sampling engine oil. Needs no priming.
- Features 11" (28cm) flexible hose and durable corrosion resistant finish.
- Capacity: 500 c.c.



KA-AL504 Heavy-Duty Dual Transfer Pump

- 1. Aluminum construction of container tube and durable plunger.
- 2. Two way vinyl hoses for suction and discharge of fluids.
- 3. Durable check valve.
- 4. Capacity: 500 c.c.
- 5. Equipped with 2 pieces flexible plastic hose.
- 6. Ideal for emergency gas transfer directly from one vehicle to another. Also for draining oils and other fluids. Portable, easy to operated, for farm, automotive, home and factory use.





KA-1353 Tire Chain Chock

- For fitting snow chain or ensures safe parking on steep slopes.
- Suitable for all cars, vans, RV, light trucks,...etc.
- Indispensable for every vehicle.
- Dimensions: 37(L) x 21(W) x 7.8(H) cm.
- Material: PP









KA-1351 Instant Traction

- Never get stuck again for use in snow or mud.
- Made of high impact plastic and brass.
- 1 pair /2 pcs over 44" long.
- For cars, vans and light duty trucks.
- The long sections have traction surfaces that provide the necessary grip to vehicle unstuck.
- Cold resistance: -30°C







	-	
Item No.	Maximum load	Dimensions (L x W x H)
KA-1350A	10 tons	120 x 29 x 17 cm
KA-1350B	10 tons	100 x 23 x 13 cm
KA-1350C	3 tons	91 x 30 x 17 cm
KA-1350D	15 tons	120 x 29 x 20 cm











KA-1352PS Pallet Stopper

- Material: heavy impact PP.
- Dimensions: 27 x 16.5 cm.







KA-1352D Stopper & Protector

- Stop sign 1pcs: 55(L) x 28(W) cm
- Ensure the correct position of the vehicle in the garage before affixing the stop sign to the floor.
- Doors & Fenders protector 2 pcs: 7.5 x 28 x 3.5 cm.
- Material: 3.5 cm thick, providing effective cushioning.















KA-1352S Stopper

- Material: Impact PP, Rubber.
- Dimensions: 17.5 x 12.5 x 10.5 cm.









KA-2176 One Hand Silicone Remover

- For scraping, cleaning and peeling silicone in all occasions.
- Easy and simple use, one hand operation.
- Built by composite plastic, strong enough to do the job.
- Will not damage surface material during the operation.

Specification:

- Dimension: 212 x 34 x 25.5mm
- Weight: 393g Material: POM



Push the remover backward to scrape the silicone.



Pull the remover backward to peel the silicone.



KA-2178 Parts Washing Brush

- Replacement flow through brush for most popular parts washer
- Solid nylon handle.
- Curved



KA-9056 Hose Slide (2pcs/set)

- Keep away from the hose or cord kinds of material crushed tightly under the tires.
- Efficient design for car washing and time saving.
- Fits nearly for any sizes of tire.
- Additional two holes could be fixed on the ground and applied in ourdoor activity as agriculture work.
- UV proof.
- Chemical Resistant.
- Made out polyethylene plastic, extremely durable.









Release Magnetic Sweeper With Wheels

 Release magnetic sweeper has a magnetic device which enables to attract any metal items and spare parts laying on the ground without picking them up one by one.

- Pull the trigger to release magnetic force.
- Easy to use, safe and practical times saving device.
- Permanent magnet.

Model	KA-2682A KA-2682B		
Rod Size	720~1035mm / 28-1/4" ~ 14-1/2"		
Total Width	377mm / 14-1/2"		
Max. Capacity	About 3.5kgs	About 6kgs	











Magnetizer & Demagnetizer

To magnetize insert tip of screwdrive

■ To magnetize, insert tip of screwdriver into hole of magnetizer.

 To demagnetize, rub tip of screwdriver along slot on top of / demagnetizer until completely demagnetized.

KA-2681A size: 25 x 25 x 25mm **KA-2681B** size: 80 x 25 x 10mm







KA-2681B









Demagnetize





- 3-in-1 functions: diameter, pitch, length.
- Suitable for male parallel bolts, studs and screws.
- Includes most common sizes in metrics and SAE.
- Convenient tool avoids incorrect bolt, stud or screw installation.
- Material: ABS.



For checking threads

- 1. Find a hole with a similar size to the object (a bolt, stud or screw to be checked) (fig.1)
- 2. Connect the object to the hole to see if the hole matches the object. Note: when the object threads match hole threads, the object can be rotated smoothly. If un-smoothness occurs, it is an indication that the threads do not match. Connection with force may cause hole threads damaged.







For checking diameter

- 1. Position the object against the innermost part of the V-shape groove.
- 2. Find the point where the edges of the object and the gauge touch each other (see the arrows on fig 2), and read the marking.


For checking length

- 1. Place the object on both sides of the gauge (SAE on the right and metrics on the left)
- 2. One end of the object should align the upper line of the gauge (fig.3 and fig.4) and read the marking.



Bumper Stand K/D Type

- Can put wood, iron, bumper car door window glass.
- The supporting frames 5mm EVA, placeable items non-slip, scratch-resistant shockproof role.
- Can be used in car of sheet metal spray etc.



KT-1206

- Size: 110 x 80 x 240 cm
- Can with stand the weight of 240kg.



KT-1203

- Size: 110 x 80 x 40cm
- Can with stand the weight of 120kgs



KA-4507 Mini Digital Protractor

Introduction:

This is a measuring tool that provides an immediate, digital reading of all angles in a 360° cicle. It is easy to be carried and used for its small size and light weight. Measuring plane containing magnet material can stick to the surface to be measured. It is especially easy to measure bevel angle of miter saw, and any small area surface.

When mount on a rigid platform, this measuring tool allows the sensor and its microprocessor circuit to provide excellent accuracy throughout the Inclinometer's 360° ragne.

Features:

- Small and protable
- Faster and more precise measurement of gradient
- Freezing readout on LCD display
- Level readout in different ways: (°, %, IN/FT)
- Easy to calibration without extra tools
- Magnetic base allows for hand free operation
- Automatic shutdown for power saving, low battery warning



■ Dimension: 50.8mm x 50.8mm x 31.0mm

■ Range: 360° (90° x 4)

■ Accuracy: $\pm 0.1^{\circ}$ (10~40°C), $\pm 0.2^{\circ}$ (0~10°C, 40~50°C)

■ Resolution: 0.1°


■ Operating Temp.: 0° C ~ 50° C

■ Storage Temp.: -10° C $\sim 60^{\circ}$ C $(14^{\circ}$ F $\sim 140^{\circ}$ F)

■ Battery: 3V CR2032 x 3

■ Weight: 130g






KA-1355 Under Hood Light Bracket

■ The under hood bracket telescopes from 112cm to 180cm to fit most vehicles.





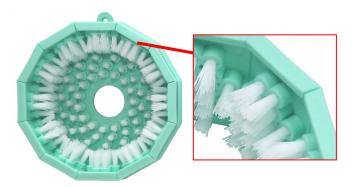

Finger Nail Brush for Mechanics

Fun and Easy Way to clean your hands!!

Description:

The Finger and Nail Brush is specially designed to clean the finger and nails of mechanics.

Wet your hands with soapy solutions, insert your hands, twist and rotate and comes your clean hands!!

Kingtool Finger and Nail brush is a wonderful gadget that every mechanics shall have!!

Feature:

Each bundle is meticulously arranged to reach and clean the nail groove.

The brush strip could be removed and fold backward to form a hand-held brush.



KA-FB001 The strand is staggered arranged.
KA-FB002 The strand is aligned arranged.







AdBlue Filling Funnel

- AdBlue filling funnel connects to all filling neck.
- Separate air breathing design for easy filling.
- Open/Close valve to stop filling once the tank is full.
- Transparent level scale.
- Funnel cover to prevent dust.

KA-7842A Stralight KA-7842B Angle





KA-7840 Flexible Filling Hose For AdBlue / DEF / AUS32





KT-N0004

5 In 1 Convertible Creeper With 39 LED Bulbs



- Dimensions: 43-1/4"(L) x 16"(W) x 6"(H)
 (1100 mm(L) x 406mm(W) x 155mm(H))
- Weight Capacity: 450 lbs.
- PAT. USA / Taiwan
- Features:
 - 1. Muti-Function
 - Flat creeper
 - Shop seat
 - LED lighting
 - Tool tray
 - 2. Quickly and easily converts from creeper to shop seat.
 - 3. Six Ø3.0" swivel castors for easy maneuverability.
 - 4. 1" tubular iron construction with mat and lighting.
 - 5. LED type: 3528 SMD
 - 6. LED quantity: 39pcs LED white bulbs.
 - 7. Version with switch.
 - 8. Bright light despite low current draw.
 - 9. Mat wrinkle-Resistant, Anti-Slip.
 - 10. Kneeling mat also separately available.
 - 11. Power: AA battery x 8pcs /4pcs





Shop Seat

Shop Seat





LED Lighting

Tool Tray

KT-N0005 Convertible Creeper



- Dimensions: 43-1/4"(L) x 16"(W) x 6"(H)
 (1100 mm(L) x 406mm(W) x 155mm(H))
- Weight Capacity: 450 lbs.
- PAT. USA / Taiwan
- Features:
 - 1. Muti-Function
 - Flat creeper
 - Shop seat
 - Tool tray
 - 2. Quickly and easily converts from creeper to shop seat.
 - 3. Six Ø3.0" swivel castors for easy maneuverability.
 - 4. 1" tubular iron construction with mat and lighting.





Shop Seat

Tool Tray



KA-9054 2 In 1 Creeper Seat With Adjustable Tray

- An ideal accessory for any garage, workshop or auto detailing shop.
- Durable and comfortable large (11.8") 2-1/2" thick round seat.
- 17" to 21" pneumatic gas lift seat height adjustment makes this creeper versatile for a variety of work environments.
- Rugged steel construction with padded cushion seat for durable use and a comfortable seat.
- Tool tray can rotate 360°.
- Tool tray can with adjustable hydraulic rise / fall.
- Dimensions: 530mm(H) x 380mm(W)
- 5pcs 3.0" heavy duty construction wheels.
- Weight Capacity: 350 LBS
- Pat.: Taiwan, China, U.S.A. / patent pending: Germany





48" KA-4123-48

36" KA-4123-36

24" KA-4123-24


12" KA-4123-12




Tube-Type Cleaner With Air

- Tube type cleaner with compressed air to clean hard-to-access areas, such as filters and radiator.
- 90° angle and 5-port air outlet to increase accessibility and maximize air pressure and volume (Fig. 1).
- Ergonomic handle design enables users to control the air direction easily and work with the tool comfortably (Fig. 2).









Specification:		
Tube material	Aluminum	
Working Pressure	90 psi / 6.2 bar	
Max. pressure	170 psi / 11.7 bar	
Avg. air consumption	5 CFM / 140 LPM	
Inlet threads	1/4"	

Item No.	KA-4123-12	KA-4123-24 KA-4123-24UL	KA-4123-36	KA-4123-48
Tube length	12"	24"	36"	48"
Tube length	304mm	609.6mm	914.4mm	1219.2mm
Overall length	15"	27"	39"	51.1"
Overall length	383mm	688mm	993mm	1298mm
Tolerance	±0.08" / ±2mm			

Instructions:

- 1. Connect shop air to the cleaner tool.
- 2. Insert the tube to the car part or area to be cleaned (Fig 3).
- 3. Use one hand to hold the tube for stabilization during operation (Fig 4).
- 4. Use the other hand to hold the handle.
- 5. Press the trigger to introduce air into the tool to clean.







KT-317K Fold-Up Mini File Set

- 12 different file shapes. Including: round, half round, flat, knife, triangle, square, barrette, jointing, slitting, marking, equalizing and crossing.
- Each file is locked in firmed position by a unique "push button" system while in use
- Simply press a button, the file folds out and into the body handle.
- The "compact slide-apart mechanism" makes two halves separated but also held together easily via an interlocking channel.



KA-9065 Magnetic Grounding Block

- Diameter 3-3/4".
- Ground your arc welder fast no matter what you are welding.
- Your grounding clamp connects directly to the bolt and the bolt to a high powered magnetic base that will literally stick to anything you weld.
- Perfect for pipe and pieces your grounding clamp can't fit around.





KT-GT347 Grommet Tool Kit with Hole Punch Set

- Fast And Easy To Change Upper and Lower Dies.
- No Need to Adjust The Dies After Installation.
- Install Variety of Grommets, Eyelets, Snap Buttons with Suitable Dies.
- Easy To Operate and Save Efforts.
- Hole Punches Up to 10 Sizes Help You To Make Perfect Rounds On Tents, Canvas, Leather....Etc.















Hand-held Operation Fastened on Table Small Hole Punch

















Contour Gauge

Instant template

Works well in copying the shape of irregular items, replicate the shape of moldings or match cut outs, providing you with accurate reads.

■ Flexible shaping measure ruler

This contour profile gauge can be applied to copy or track the shape of irregular objects, with ruler on the top, you can quickly figure out the size of them, instant template for marking precise tile cut.

KT-2908 5" KT-2908A 10"



4" Smart Air Regulator Air Blow Gun

- 4 Types Available !!

- Heavy Duty & Lightweight!!
- Made of Composite Material.
- 4" Smart Air Blow Gun
- Innovative Mass Flow Design
- Max Pressure: 200 psi, 14 kg/cm²
- Air Inlet: 1/4" NPT
- Temperature Range: -40°C~60°C

(-40°F~140°F)

■ 4 Nozzles Types Available











PA-1291 with 12" Hose PA-1291A with 8" Hose PA-12918 With 4" Hose

Composite Housing Flexible Air Blow Gun

PA-1291: Air Blow Gun with 12" Hose PA-1291A: Air Blow Gun with 8" Hose PA-1291B: Air Blow Gun with 4" Hose

- Ideal for cleaning aperture(holes) & confined space
- Fully Flexible Rubber Nozzle
- Variable Air Flow Trigger
- Robust Nylon Handle with Integrated Hanger
- Aluminum threaded insert
- Aluminum Valve made of Stainless-Steel spring to prevent moisture affect the valve mechanism

Composite Housing

* Made of Robust Nylon



Specification:

- Working pressure:60-150PSI
- Air consumption:9.5CFM
- Air Inlet: 1/4"-NPT
- Flexible hose Length:12"
- Net weight:170g
- Packing:80pcs/NW13.2kgs/GW13.6kgs /2.7Cu.ft

Flexible Rubber Nozzle





KA-9999 Smart Spray Trigger Grip Handle



A Dream Handle to Make Spraying so EASY!!

Simply Clip on! Spray on and Have Fun!

A Gadget makes working like playing!!

Patented!!

Suitable & Fit for All Standard Aerosol Cans: *Paint *
 Lubricant * Wax Cleaner * Adhesives * Party Foam *
 Bug/Insecticide...etc




Comparison:





Grip Range:



28.8mm~32.8mm Handle Size: 150x150x53mm

1. Pinch the Grip	2. Fasten over can nozzle	3. Face Nozzle Forward

Fuel Tank Funnel for Cap-less Filler system



Item No. KA-7854

For Petrol

- Fuel Funnels for cap-less filler systems of Ford vehicles
- Securely fits in filler neck, opening two valve security systems.
- D: 24.5mm





Item No. KA-7855

■ For Diesel

- Fuel Funnels for cap-less filler systems of Ford Vehicles.
- Securely fits in filler neck, opening two valve security systems.
- 0.D: 24.5mm





KA-6993 5-IN-1 Caulk Finishing Tool

- Smooth the bead of sealant such as silicon & acrylic
- Idea for floor, kitchen, bathroom and window sealing jobs.
- Can be used repeatedly and easy to clean.
- Compact design with 5 shapes of spatulas.
- Size: 135*20*21mm









36" 2-in-1 Cleaning Gun

- Cleaning the radiator with Water and dry it with Air!
- Automobiles Washing & Automobile Detailing
- Clean the air filters with air

Feature:

- 1. Aluminum Alloy Body Light and durable
- 2. 2-in-1 Design let you use with Water and Air
- 3. Water Conservation and Remove the dirt effectively.
- 4. Long Nozzle Reaches the deep gap easily to clean the dirt

Specification:

Working Pressure (Max)	232 PSI (16 Bar/1.6 Mpa)
Material	Aluminum Alloy
Medium	Air/Water
Air Hose Port Size	1/4" (G)
Water Hose Port Size	5/8" (15.875mm)
Air Consumption	IN 10KG > 300 L/M
Temp. Range	-5 ~ + 60oC (Non Frozen)



Mini Type Air Duster

Adjustable Air Flow with Control Knob! Compact Size!

Mini size, Easy to use! Ergonomic grip, Lightweight, Easy to carry







PA-2185H **High Pressure** Air Inlet Coupler Adjustable Nozzle









Air Flow Adjusting Knob

	PA-2185	PA-2185H	PA-2185A	PA-2181	PA-2183
Specification	18.275 CFM 517.4 L/Min 127 dB	38.23 CFM 1082.6 L/Min 92.6 dB	16.33 CFM 462.4 L/Min 93.5 dB	17.15 CFM 485.6 L/Min 96.2 dB	18.275 CFM 517.4 L/Min 94.9 dB
Material	Aluminum	Aluminum	Aluminum	PA + GF	PA + GF
Length:	87mm	89.5mm	82mm	82mm	87mm
Push Button	•	•	•	•	•
Air Flow Adjustable Nozzle	•	•	-		•
Air Flow Adjusting Knob			•	•	
High Pressure Air Inlet Coupler		•	-		-
Regular Coupler	•		•	•	•

Optional Accessory of Mini Air Duster:



TSV 63mmL tilted soft nozzle (TPV)

SR



3A-F Air spreader nozzle












Air concentration nozzle (PA)





PA-2185-H00K-P



MR 25mm rubber nozzle

13mm rubber nozzle



3A-L High flow nozzle / Side nozzle (PA)








LR 35mm rubber nozzle



S6 Air shield nozzle





1L Mini mini type high flow nozzle (PA)



Safety nozzle

SA

IN



2L Mini mini type high flow nozzle (Aluminum)



Inflator 球針



Fire Resistant

Absorbent Pad /Roll for Oil, Liquid, Oil+ Liquid

- Very high absorption and fast in handling spills
- Keep your work environment dry, clean and safe!
- Absorbs and retains oil, water, solvents, coolants...etc
- Center perforated for a customized fit and can be used many times.
- Great for using in maritime engineering, military, chemical or petrochemical plants, laboratories, pharmaceuticals, medical institutions, electronics technology, manufacturing industries, machinery factories, auto repair shops, printing, food processing, kitchens, etc
- 100% Made in Taiwan


Grey Pad (KT-8001G series)
Universal Type, Absorb oil, liquid, chemical

Yellow Pad (KT-8001Y series)
Absorb liquid

White Pad (KT-8001W series) Absorb oil

- 1. Absorbs oil liquids but not water.
- 2. Absorbing 15 to 20 times its weight without sinking into water.
- 3. After absorbing the oil and squeezing it out, the absorption capacity of the pad may decrease







Application	Pad Color	Item no.	Thickness (mm)	Size W * L (mm)
Universal Type Absorb oil, Liquid, Chemical	Grey	KT-8001G2	2	400 * 500
		KT-8001G3	3	430 * 480
		KT-8001G4	4	400 * 500
Absorb Liquid	Yellow	KT-8001Y2	2	400 * 500
		KT-8001Y3	3	430 * 480
		KT-8001Y4	4	400 * 500
Absorb Oil	White	KT-8001W2	2	400 * 500
		KT-8001W3	3	430 * 480
		KT-8001W4	4	400 * 500



Application	Pad Color	Item no.	Thickness (mm)	Size W * L (m)
Universal Type Absorb oil, Liquid, Chemical	Grey	KT-8002G3	3	1*43 m
		KT-8002G3.5	3.5	1*43 m
Absorb Liquid	Yellow	KT-8002Y3	3	1*43 m
		KT-8002Y3.5	3.5	1*43 m
Absorb Oil	White	KT-8002W3	3	1*43 m
		KT-8002W3.5	3.5	1*43 m



- Easy to Install and Remove.
- The 1/4" (6mm) mandrel set comes with two thread heads: 1/4"(6mm) & 3/8"(10mm) arbor.





 For various type so grinding wheel: cleaning, sanding, grinding, polishing, descaling, deburring.

- Multiple application & Versatile:
 - Fits the small diameter cut-off wheel or circular saw blades with 1/4" or 3/8" core hole.
 - Fits for Electric / Cordless Drill, High Speed Air Cut-off Tools
 - Fit most drill and die grinder & HSS Saw Blades.
- Durable & Rust-Resistant: Made of High-grade Carbon Steel.













KA-5146 Flexible Inspection Mirror Tool

- L: 470mm (18.5")
- Mirror: 55mm



KA-5147 Inspection Mirror Tool

- L: 370mm (14.5")
- Mirror: 2-1/4"



KA-5148 Inspection Mirror Tool

- L: 270~535mm
- Mirror: 30mm



KA-5151 Ultra-Thin Flexible Light

■ L: 650mm + Handle 450mm



KA-6474

Flexible Inspection Mirror W/Magnetic Pick Up Tool

- Capacity: 3.5lbs(1.6kgs)
- Length: 590mm(23.6")



KA-6460 Flexible & Stick Inspection Steel Mirror

- Mirror: 40mm(1.6")
- Length: 275mm(11")



KA-6475 2-IN-1 Magnetic & Mirror

- Magnetic: 1.1lbs
- Length: 185mm 540mm (7-1/4" to 21-1/4")
- Mirror 32mm DIA.



KA-5150 5-IN-1 Telescoping Magnetic Pick-Up & Mirror Tool

- Magnetic Capacity: 8.0~5.5~1.5Lbs
- Mirror: 30mm & 85 x 45mm
- L: 170~762mm



KA-6478 3-IN-1 Lighted/Magnetic/Mirror

- 25 x 50mm swivel inspection mirror & magnetic retriever
- Length: 500mm



KA-6467 **Telescoping Inspection Mirror Tool**

- Mirror: 50 x 90mm (2"x3-1/2")
- Length: 290-430mm (11.6"-17.2")



Telescoping Inspection Mirror Tool KA-6468

- Mirror: 63mm (2-1/2")
- Length: 280-580mm (11.2"-23.2")





KA-6469 Telescoping Inspection Mirror Tool

- Mirror: 25 x 50mm (1" x 2")
- Length(including mirror): 140 550mm (5-1/2" to 21-3/4")
- 5-section extends mirror rods with pocket clip.



KA-6471 Telescoping Inspection Mirror Tool

Mirror: 32mmLength: 210 -540mm



KA-6472 2 IN 1 Inspection Mirror & Magnetic Tool

Mirror: 38mmLength: 210-700mmCapacity:1.1lbs



KA-6464

Combination Multi-Function Inspection Mirror

- Inspection mirror
- Moveable light w/magnetic
- Wiper water cleaner jet
- Mirror: 30 x 50mm
- Length: 305 720mm



KA-6463 Telescoping Inspection Steel Mirror Tool

Mirror: 30 x 50mm Length: 305 – 720mm



KA-6462 Flexible & Telescopic-Stick Inspection Steel Mirror W/Light

- Mirror: 70mm (28")
- Length: 355mm -750mm (14.2"-30")



KA-6461 Flexible & Telescopic-Stick Inspection Steel Mirror W/Light

- Mirror: 50mm (2")
- Length: 355mm -730mm (14.2"-29.2")



KA-2990 Telescope Security Mirror

- Adjustable, convex, 8" acrylic mirror has a 180° view angle
- Telescope aluminum rod, 660~1280mm, light to carry and grip
- Checking under vehicles or equipments at security checkpoints
- Security mirror helps to estimate blind spots
- Easy to use and storage in workplace
- Ergonomic handle for comfort

Specification:

- Length: 660~1280mm
- Convex Mirror: Ø8" (20.32cm)
- Material of mirror: Acrylic
- Handle grip material : TPR
- Weight: 0.6kgs







KA-2718 Flexible Magnet Pick-Up Tool

- ∮: 3.2mm For Confined Space Jobs
- L: 525mm
- Capacity: 0.4LBS



KA-2719 Flexible Magnet Pick-Up Tool

- \$\operatorname{\psi}\$: 3.2mm For Confined Space Jobs
- L: 1070mm
- Capacity: 0.4LBS



KA-2886 Multi-Function Inspection Tools

1PC-Aluminium Interchangeable Handle
1PC-Inspection Mirror
1PC-6 lbs Magnetic retriever
1PC-10" flexible adapter
1PC-9"135 degree bended adapter
1PC-8" straight adapter
1PC-UV light
1PC-LED light
PACKING: (w/o battery)
EVA foam-lined plastic case + color box
24 pcs/ctn; 14.5/15.5kgs 1.6'



Deteck radiator leak with UV light




Attract small parts in dark place by magnet & LED Light



Inspect parts in dark place by mirror & LED light











(A) KA-5201 Combination of Multi-Function Telescoping Inspection Mirror Tool

Length : 310mm to 710mm. Mirror 50mmx30mm W/Light windshield wiper water jet outlet needle

(B) KA-5202 Telescoping Inspection Mirror Tool Length: 310mm to 710mm. Mirror 50mmx30mm w/light.

- (C) KA-5203 Telescoping Inspection Mirror Tool
 Length: 310mm to 710mm. Mirror 50mmx30mm
- (D) KA-5204 Flexible Mirror With Light Tool
 Oval Mirror 25mmx50mm. baty Length: 500mm.
 V/O battery (DC 2 AA's 1.5 voits).
- (E) KA-5205 Flexible Inspection Mirror Tool
 Length: 470mm. Mirror 55mm DIA. Flexible spring Steel.
 Neck Allovs Vieving in Hard-to-see Areas. PVC Handle.
- (F) KA-5206 Inspection Mirror Tool
 PVC red handle, Mirror 55mm DIA. baty Length: 370mm.
- (G) KA-5207 Telescoping Inspection Mirror Tool Length: 145mm to 545mm. Mirror 40mm DIA.
- (H) KA-5208 Inspection Mirror Tool Length: 210mm. Mirror 38mm DIA.
- (I) KA-5209 Flexible Magnet Pick-Up Tools
 PVC Handle. Pick-up 3.5 LBS. Length: 460mm.
- (J) KA-5210 Carburetor Adjusting Tool
 For adjusting idle/mixture screws on GM & CHRYSLER
- (K) KA-5211 Flexible Magnet Pick-Up Tools
 Length: 59cm. Pick-up 3.3LBS.
- (L) KA-5212 Flexible Magnet Pick-Up Tools
 Length: 520mm. Pick-up 0.7LBS

(M) KA-5213 Telescoping Magnetic Pick-Up Tool

Length: 310mm to 700mm. Pick-up 3.3LBS

(P) KA-5216 Telescoping Magnetic Pick-Up Tool

Length: 270mm to 710mm. Pick-up 3.5LBS

Stainless Steel Magnetic Bar

KA-5141

Capacity: 8.0Lbs/3.6Kgs, L: 170~762mm

KA-5142


Capacity: 5.5Lbs/2.5Kgs, L: 170~762mm

KA-5143

Capacity: 3.5Lbs/1.6Kgs, L: 170~880mm

KA-5144

Capacity: 1.5Lbs/0.7Kgs, L: 165~880mm











(A) KA-5217 Magnetic Moveable Light

(B) KA-5218 Multi-Function Magnetic Pick-Up Tool

- W/Windshield wiper jet outlet needle
- Pick Up 0.8LBS
- (C) KA-5219 Telescoping Magnetic Pick-Up Tools
 Telescopes From 130mm to 640mm. Pick-up 3.5LBS
- (D) KA-5220 Telescoping Magnetic Pick-Up Tools
 Telescopes From 130mm to 640mm. Pick-up 5.5LBS
- (E) KA-5221 Telescoping Magnetic Pick-Up Tools
 Telescopes From 130mm to 640mm. Pick-up 3.5LBS
- (F) KA-5222 Telescoping Magnetic Pick-Up Tools
 Telescopes From 130mm to 640mm. Pick-up 3.5LBS
- (G) KA-5223 Telescoping Magnetic Pick-Up Tools
 Telescopes From 125mm to 640mm. Pick-up 1.0LBS
- (H) KA-5224 Rectangular Magnetic Tray
- (I) KA-5225 Spare Parts Magnetic Dish 150mm
- (J) KA-5226 2pcs Magnetic Set 1pc 150mm MAGNETIC DISH 1pc FLEXIBLE MAGNETIC PICK UP TOOL Pick-up 3.5LBS
- (K) KA-5227 Magnetic Pick-Up Tool Length: 550mm; Pick-up 3.5LBS
- (L) KA-5228 Pick-Up Tool W/O Magnetic Length: 620mm
- (M) KA-5229 Flexible Inspection Mirror
 W/Magnetic pick up tool
 Length: 580MM Pick-up 3.5LBS

(N) KA-5230

Telescope Pick-Up Tool and Inspection Mirror Set

Feature: Brass chrome plated tube. Size: L = 29.5cm-45cm, L = 30cm-45.5cm





KA-5620 3pcs Flexible Pick-Up Tool Set

- Extra-long (24") with Flexible ends bend to desired angles to remove the screw clamps quickly and easily. Reach any hard-to-reach areas.
- 1/4" Bit Holder for all standard 1/4" sockets bits.
- 1/4" Socket driver for all standard 1/4" sockets.
- Magnetic Pick-up tool can be used as a claw or magnet to retrieve small parts in hard-to- reach areas.







Pick-Up Tool



1/4" Magnetic Socket Drive



Flexible Shaft Magnetic End

KA-5228A 3 IN 1 Pick-Up Tool

- Overall length: 24"(610mm)
- Magnetic field intensity: 1 KG
- Grab: 1 KG
- With LED light









Anti-magnetic tube Magnetic pick-up

Hook-type claw Removable LED lamp



KA-5228B Pick-Up Tool

- Overall length: 700mm
- Magnetic field intensity: 800g
- Grab: 1 KG



KA-5228C 3 IN 1 Pick-Up Tool

- Overall length: 700mm
- Magnetic field intensity: 800g
- Grab: 1 KG
- With LED light



KA-6328 Telescopic Magnetic Bar

W/Magnetic Handle

When repairing engine tank, you can use this bar to pick up parts if the temperature of the engine is very high.



KA-6329

Flexible Rod With Magnetic Tip Multi-Purpose Magnetic Tool Kit

- Flexible rod with magnetic tip
- Telescopic magnetic bar with magnetic handle
- Windshield wiper water jet outlet needle
- Magnetic cap opener



KA-6330 Flexible Magnetic Bar

W/Magnetic Handle.

You can adjust the angle of the bar as you like, and the bar can suck hardware spare parts which fall down the place where we can not reach.



KA-6331 Flexible Magnetic Bar

W/Magnetic Handle

When repairing engine tank, you can use this bar to pick up parts if the temperature of the engine is very high.





KA-5754 Retriever Flexible Tools

- L:510mm
- Can be adjusted up to 90∘angle



■ L:370 to 810mm



KA-3868 Magnetic Flexible Light

■ L:740mm



KA-5145 Telescoping Magnetic Pick-Up Tool

- L: 360~610mm (14"~24")
- Ball joint head 90° swivel



KA-5149 Flexible Magnetic Pick-Up Tool

- Capacity: 3.5Lbs
- L: 535mm



- KA-6466 Pick Up Tool
 Bendable magnetic bar
 Capacity: 3.5lbs
 Length: 350mm
- Telescopic light magnetic pick-up tool



KA-6476 Magnetic Pick Up Tool

- Capacity: 3.5lbs
- Length: 210mm 540mm(8.4" 21.6")



2 IN 1 Light & Magnetic Pick Up Tool

KA-6470 Length: 65 - 660mm

Capacity: 1.5LBS

KA-6470A Length: 180 – 650mm

Capacity: 5.5lbs



KA-6478 H/D 3-IN-1 Lighted Magnetic & Mirror

- L: 455mm
- Capacity: 3.5Lbs
- 25 x 25mm mirror






KA-3574 Crank LED Lighted Magnetic Flexible Pick-up Tool

- General power by cranking
- Crank charge function good for emergency and Environmental.
- Mangnetic pick up (up to 1Kg)
- Overal length 600mm (24") with flexible shaft
- LED: 20000 MCDL1: 1.6V 40MAMaterial: Handle: ABS

Flexible shaft: WIRE + Chrome Plated





KA-5153 Flexible Magnetic Flach Light

- Flexible shaft can reach to narrow and curved space.
- Replaceable LED bulb w/magnetic head
- Bright LED lights up the darkness by 3pcs LR44
- Strong magnetic bottom of the handle can attract on machine/cars.
- Many applications: auto, machinery, fishing, computer...
- Optional Accessories: clip / Ø32mm around inspection mirror



KA-6334 Ball -Pen/Flashlight

Multi-Purpose Light/Ball-Pen/Flashlight



KA-6477 9-IN-1 Handy Tool (space-shuttle)

1. Telescopic-Stick 2. Torch 3. Light Pen

4. Water Cleaner Jet 5. Carving Needle 6. Water Spurting Adjuster

7. Precision Philip Bit 8. Precision Flat Bit 9. Magnetic Body



KA-2852 Pen Type UV Light

- 190mm
- Weight: 30 g
- Click On/ Off
- Pocket Clip





KA-2854 UV Flexible Light

■ Total Length: 300mm

Weight: 450g

KA-2855 UV Flexible Light

Total Length: 400mm

Weight: 460g



Content:

- UV Flexible Light (300 or 400mm)
- KA-2853 UV Light Bulb OR KA-2862 LED Light Bulb
- Optic Fiber Light Guide (175mm- Optic Fiber Parts)
- KA-2863S Light Holder with Magnetic Base-Tight Grip, 67mm,35g



KA-2856 (with 300mm UV flexible light) KA-2857 (with 400mm UV flexible light)





KA-5152 3 IN 1 ULTRA THIN LIGHT

- Good helper for repairing
- Good assistant for a maintenance man
- Invincible for a searcher

Is the all - in -one series product.

It can brighten in any area you want.

It can lighten anywhere even narrow corner.

It is the must for you to suit your need, and lighten the dark corner wherever you are

- Light bulb specifications.
 - 1. E10: Philips bulb (2.25V x 0.25A) 2.E5: Krypton bulb (2.4V x 0.5A)
 - 2. Fiber optic light guide (Ø 3 mm)





UV Light Bulb KA-2853 **LED Light Bulb** KA-2862



KA-2863F Optic Fiber Wand





KA-2863S CLOSE



KA-2863 LONG & OPEN

KA-2863S 67mm Light Holder W/Magnetic Base KA-2863 82mm Long Light Holder W/Magnetic Base



Kingtool co., Itd / Tien Chien Enterprises co., Ltd E-mail: info@autotool.com.tw



KA-3865 LED Mini Flash Light

■ 190 mm



KA-2867 LED Mini Flash Light (190 mm) SET

- 190mm
- KA-3865 LED Mini flashlight
- Optic light guide, light holder w/magnetic base



Magnetic LED Mini Flexible Flash Light

KA-2870 L: 300 mm **KA-3867** L: 400 mm



Flexible LED Flash Light Set

Content:

- 300mm or 400mm flexible LED flashlight
- KA-2863S Light holder w/magnetic base

KA-2868 (with 300mm flexible LED flash light)
KA-2869 (with 400mm flexible LED flash light)



LED Mini Flexible Flash Light Set

Content:

- 300mm or 400mm LED Flexible Light
- KA-2853 UV Light Bulb OR KA-2862 LED Light Bulb
- Optic Fiber Light Guide (175mm- Optic Fiber Parts)
- KA-2863S Light Holder with Magnetic Base
- Tight Grip, 67mm, 35g

KA-2864 (with 300mm LED flexible light)
KA-2865 (with 400mm LED flexible light)















Magnetic LED Mini Flexible Flash Light

KA-2866 300mm **KA-3866** 400mm





Magnetic LED Mini Flexible Light Set

Content:

- 300mm or 400mm Magnetic LED Mini Flexible Light
- KA-2863S Light Holder w/ Magnet Base

KA-2860 (with 300mm Magnetic LED Mini Flexible Light)
KA-2861 (with 400mm Magnetic LED Mini Flexible Light)





Magnetic LED Mini Flexible Light Set

Content:

- 300mm or 400mm LED Flexible Light w/ Magnetic Tip
- KA-2853 UV Light Bulb OR KA-2862 LED Light Bulb
- Optic Fiber Light Guide (175mm- Optic Fiber Parts)
- KA-2863S Light Holder with Magnetic Base-Tight Grip, 67mm, 35g

KA-2858 (with 300mm Magnetic LED Mini Flexible Light)
KA-2859 (with 400mm Magnetic LED Mini Flexible Light)









KA-3571 Mini Working Lamp Flexible & Magnetic

Combine 4 useful functions in 1unit

- LED Light
- Flexible Tube → fix the angle accuracy
- Powerful Magnet→ retrieve items in tight areas
- Magnetic Stand → attach firmly
- With 3pcs LR 41(1.5V) batteries

















KA-EP222-6BX 6 Drawer Top Chest



KA-EP222-9BX 9 Drawer Top Chest



KA-EP333-6BX 6 Drawer Top Chest



KA-EP333-12BX 12 Drawer Top Chest

Item No.	Overall (W x D x H)	Drawers (W x D x H)		Steel Thickness	Packing (N.W./G.W./CUFT)	
		3 Drawers	170 x 275 x 50 mm			
KA-EP222-6BX	660 x 307 x 374 mm	2 Drawers	569 x 275 x 50 mm	Body: 0.8mm Drawer: 0.7mm	23.9 / 26.9 / 3.97'	
		1 Drawer	269 x 275 x 75 mm	Diawer. O.7 min		
		6 Drawers	170 x 275 x 50 mm	Dody O Orom		
KA-EP222-9BX		Body: 0.8mm Drawer: 0.7mm	28.4 / 32.4 /4.3'			
		1 Drawer	569 x 275 x 75 mm			
KA-EP333-6BX	660 x 455 x 483 mm	5 Drawers	576 x 410 x 48.5 mm	Top & bottom covers: 1.0mm	40 5 / 50 5 / 0 50	
NA-EP333-0DX	000 X 455 X 463 IIIII	1 Drawer	576 x 410 x 75 mm	Body: 1.2mm Drawer: 1.0mm	46.5 / 52.5 / 8.58'	
		9 Drawers	169 x 410 x 48.5 mm	Top & bottom covers:		
KA-EP333-12BX	660 x 455 x 483 mm	2 Drawers	576 x 410 x 48.5 mm	1.0mm Body: 1.2mm	55.5 / 59.2 / 8.58'	
		1 Drawer	576 x 410 x 75mm	Drawer: 1.0mm		

 $oldsymbol{st}$ ball bearing slide on all drawers



KA-ET303 Trolley With 3 Drawers Heavy Duty



KA-ET304 Trolley With 4 Drawers Heavy Duty

Item No.	Overall (W x D x H)	Overall + Caster (W x D x H)	Drawers (W x D x H)		Steel Thickness	Packing (N.W./G.W./CUFT)
KA-ET303	764 x 490 x 754 mm	W/4" casters	2 Drawers	298 x 445 x 81 mm	Cover: 1.8mm Body: 1.0mm	49 / 53.4 / 8.7'
KA-E1303	764 X 490 X 754 IIIII	764 x 490 x 884 mm	1 Drawer	2628 x 445 x 81 mm	Drawer:1.0mm Pillar: 2.0mm	49 / 55.4 / 6.7
		W/4" casters 764 x 490 x 1020 mm	2 Drawers	298 x 445 x 81 mm	Cover: 1.8mm Body: 1.0mm Drawer: 1.0mm Pillar: 2.0mm	60 / 65 / 10.82'
KA-ET304	764 x 490 x 890 mm		1 Drawer	628 x 445 x 81 mm		
			1 Drawer	628 x 445 x 127 mm		

* ball bearing slide on all drawers







8 Drawer Roll-Wagon

KA-W26-6XL 6 Drawer Roll-Wagon



10 Drawer Roll-Wagon

KA-W26-7X 7 Drawer Roll-Wagon



KA-W53-13X 53" 13 Drawer Roll-Wagon Fully shelf-Closing

Item No.	Overall (mm) (W x D x H)	Overall + Caster (mm) (W x D x H)	Draw	ers (W x D x H)	Steel Thickness	Packing (N.W./G.W./CUFT)
KA 14/00 EV	070 100 051	W/4" casters	3 Drawers	576 x 380 x 75 mm		50.5 / 57.5 / 40.00
KA-W26-5X	670 x 460 x 654	670 x 460 x 777	1 Drawer	r 2628 x 445 x 81 mm	50.5 / 57.5 / 10.03'	
KA-W26-6XL	670 x 460 x 812	W/5" casters	3 Drawers	576 x 380 x 75 mm		62.7 / 70.7 / 12.24
KA-WZ6-6XL	670 X 460 X 812	670 x 450 x 960	3 Drawers	576 x 380 x 154 mm		62.7 / 70.7 / 12.24
KA-W26-7X	670 x 460 x 812	W/5" casters	5 Drawers	576 x 380 x 75 mm	Top & Bottom	64 / 72 / 12.24'
KA-W26-/X	670 X 460 X 812	670 x 460 x 960	2 Drawer	576 x 380 x 154 mm	cover: 1.2mm Body: 1.0mm Drawer:1.0mm	
KA-W26-8X	670 x 460 x 812	W/5" casters	7 Drawers	576 x 380 x 75 mm		66 / 74 / 12.24'
NA-VV20-0X	670 X 460 X 612	670 x 460 x 960	1 Drawer	576 x 380 x 154 mm		
			6 Drawers	576 x 380 x 48.5 mm		
KA-W26-10X	670 x 460 x 812	W/5" casters 670 x 460 x 960	3 Drawers	576 x 380 x 75 mm		69 / 83.5 / 12.24'
			1 Drawer	576 x 380 x 154mm		
			10 Drawers	576 x 380 x 75 mm	Top & Bottom cover: 1.5mm Body: 1.2mm Drawer: 1.0mm	
KA-W53-13X	1358 x 460 x 980	W/6" casters 1358 x 460 x 1150	2 Drawers	576 x 380 x 154mm		166 / 180 / 31.54
			1 Drawer	1215 x 380 x 173 mm		

* ball bearing slide on all drawers

Function

- One piece steel of cabinet body provide more strength to whole one unit body structure.
- Hemmed edge for all drawers and body to add strength and safety.
- 100 numbers internal locking system for extra security.
- Quick release design on ball bearing slide can be easily removed for replacement.
- 100% open ball bearing slide.
- Patented locking system. Pushing unlocked drawer to be locked while all other are locked.
- Tool tray / side handle for easy lifting of roller wagon and can be holder for frequently used supplies.
- 2 fixed caster + swivel caster with brake.
- 2mm protective drawer liners.
- Powder coating finishing.
- Two fixture on two sides, can be attached and hung other equipment.
- Drawer are interchangeable.
- Additional patented design one drawer open at a time locking system and shelf-closing ball bearing slide at your option.
- Another drawer depth 410mm of W26 series for option.










KA-WB59E Workbench W/Backpanel Plus 2 Wall Cabinets



KA-WB59B Workbench Plus 3 Drawer Chest

(KA-WB59A Plus 3 drawer chest)



KA-WB59D Workbench W/ Backpanel Plus 3 Drawer Chest (KA-WB59C Plus 3 drawer chest)



KA-WB59F Combo Workbench Plus 2 Wall Cabinets (KA-WB59E Plus 3 drawer chest and 2 wall cabinets)

		KA-WB59A	KA-WB59B	KA-WB59C	KA-WB59D	KA-WB59E	KA-WB59F
Ove (W x D x		1525 x 700 x 800	1525 x 700 x 800	1525 x 700 x 1520	1525 x 700 x 1520	1525 x 700 x 1520	1525 x 700 x 1520
Back pand (W x E			-	1525 x 20 x 700	1525 x 20 x 700	1525 x 20 x 500	1525 x 20 x 700
2 Wall 0 (W x D x			-		-	400 x 200 x 500	400 x 200 x 500
Drawer Che (W x D x			W/3 Drawer Chest 600 x 307 x 251		W/3 Drawer Chest 660 x 307 x 251		W/3 Drawer Chest 660 x 307 x 251
Drawers	2 Drawers		569 x 275 x 50 mm		569 x 275 x 50 mm		569 x 275 x 50 mm
(W x D x H)	1 Drawer		569 x 275 x 75 mm		569 x 275 x 75 mm		569 x 275 x 75 mm
Steel Th (mi		Workench: 2.0 Pillar: 2.0	Workench: 2.0 Drawer: 0.7 Pillar: 2.0	Workbench: 2.0 Drawer: 0.7 Backpanel: 1.0 Pillar: 2.0	Workbench: 2.0 Drawer: 0.7 Backpanel: 1.0 Pillar: 2.0	Workbench: 2.0 Wall cabinet: 1.0	Workbench: 2.0 Drawer: 0.7 Wall cabinet: 1.0 Backpanel: 1.0 Pillar: 2.0
Pack (N.W./G.V	•	48 / 49.5 / 6.5'	Box 1 of 2: 48 / 49.5 / 6.5' Box 2 of 2: 13 / 15.5 /2.7'	59 / 62 / 6.5'	Box 1 of 2: 59 / 62 / 6.5' Box 2 of 2: 13 / 15.5 / 2.7'	Box 1 of 2: 59 / 62 / 6.5' Box 2 of 2: 14 / 15.4 / 4.5'	Box 1 of 2: 59 / 62 / 6.5' Box 2 of 2: 32.2 / 35.2 / 8'

^{*} ball bearing slide on all drawers






KA-EP213X 3 Drawers Portable Tool Chest

	KA-EP213X
Overall (W x D x H)	533 x 220 x 232.5 mm
Drawer Chest Overall (W x D x H)	504 x 195 x 51.5 mm
Steel Thickness	Body: 0.8mm Drawer: 0.7mm
Packing (N.W./G.W./CUFT)	11.2 / 11.9 / 2.05'



KA-T28 Three Shelf Trolley



KA-T28-1 One Drawer Trolley

- Two 3.5" deep trays are positioned for convenience.
- Bold pillar for extra strength
- Heavy-duty casters

Item No.	Overall (W x D x H)	Overall + Caster (W x D x H)	Drawers (W x D x H)	Steel Thickness	Packing (N.W./G.W./CUFT)
KA-T28	716 x 410 x 750 mm	W/4" casters 716 x 410 x 880 mm	-	Pillar: 2.0mm Shelf: 1.0mm	20.2 / 22.2 / 2.7'
KA-T28-1	716 x 410 x 750 mm	W/4" casters 764 x 490 x 1020 mm	1 Dawer 569 x 275 x 75 mm	Pillar: 2.0mm Shelf: 1.0mm Drawer: 0.7mm	23.2 / 24.6 / 2.75'

* ball bearing slide on all drawers



KT-7900 Adjustable Rolling Work Bench

- Height and Width Adjustable Rolling Work Table is great for tool storage and customary tools.
- Adjustable Height let you work comfortably
- Made of Durable Steel with Poder Coating, Scratch and Chemical Resistant.
- Adjustable Height: 840-1140mm
- Patent Design
- MOQ: 100









1140 MM



<u>King</u>"

Storage Organizer Assorted Case With Various Compartments

- Each compartment with belt clip for easy carrying.
- Optional divider for more storage options.
- Tough composite plastic compartment with selective configuration.
- Clear see-through design to identify contents at a glance.



Dimension:

KA-T09:(Small) 95x74x68mm KA-T06:(Middle) 143x74x68mm KA-T03:(Large) 295x74x68mm

* Tool not include





Content	KA-T612F	KA-T369F	KA-T9615F	KA-T918F
KT-09		x 6 PCS	x 9 PCS	x 18 PCS
KT-06	x 12PCS	x 4 PCS	x 6 PCS	
KT-03		x 2PCS		







Optional:

















Content	KA-T916L	KA-T936L	KA-T9612L
KT-09	x 16PCS	x 7 PCS	x 4 PCS
KT-06		x 2 PCS	x 8PCS
KT-03		x 2PCS	







Tools not included

KT-V0001 Tool Organizer

- Wall mounting type, for all kinds of hand tools
- Adjustable distance between two clips to fit all kind of tools.
- Anti-thief display card and screw box are included.
- Length of the aluminum bar: 438mm
- Overall length: 490mm
- Material: Back plate: ABS, Clip: Nylon 66
- Tools not included



Tools not included

KT-V0002 Screwdriver Organizer

- Wall mounting type, for screwdrivers
- 4 Clip diameter: 5mm, 7.5mm, 9.5mm, 12mm
- Clip the screwdriver horizontally or vertically.
- Anti-thief display card and screw box are included.
- Length of the aluminum bar: 438mm
- Overall length: 490mm
- Material: Back plate: ABS, Clip: Nylon 66
- Tools not included





Tools not included

KT-V0003 Wrench Organizer

- Wall mounting type, for wrench
- 3 hook sizes: 5mm, 7.5mm, 9.5mm, 12mm
- Anti-thief display card and screw box are included.
- Length of the aluminum bar: 438mm
- Overall length: 490mm
- Material: Back plate: ABS, Clip: Nylon 66
- Tools not included





Tools not included

Socket Organizer

KT-V0004 1/4" KT-V0005 3/8" KT-V0006 1/2"

- Wall mounting Type for Socket, Universal Joint, Extension bars, adapters, spark plug sockets.
- adapters, spark plug sockets.

 3 stud sizes: 1/4", 3/8", 1/2"
- Anti-thief display card and screw box are included.
- Length of the aluminum bar: 438mm
- Overall length: 490mm
- Material: Back plate: ABS, Clip: pp





Tools not included

Holds 9 pcs screwdrivers

- Two rows of holes for screwdrivers
- Attached to any metallic surface.
- Rubber foot prevents damages or scratching to any surface.

Magnetic Screwdriver Holder

Size: 280mm (11")

KA-2693



Tools not included

Super Magnetic Tool Holder

- The magnetic tool holder have strong magnet.
- Option screws for wall-fixing.
- Material → Holder: ABS,

Magnet: Heavy Duty 1000 gauss permanent magnet. Protective Covering: rough stainless steel cause not corrosion.

KA-2699 12" (300mm) KA-2700 18" (450mm)





(Without Hook)



Tools not included

Magnetic Tool Holder

- Strong magnet designs to hold tools and parts firmly and securely.
- Organizes tools and keeps them visible and handy at any time
- Material: Holder-Plastic (ABS)

Protective covering-tough stainless steel will not corrode.

- Magnet: Magnet-heavy-duty 1000 gauss permanent magnet.
- Rubber: Protective rubber foot prevents from damage to valuable surfaces.

KA-2701 12" (300mm), with hook KA-2702 24" (610mm), with hook KA-2701N 12" (300mm), without hook KA-2702N 24" (610mm), without hook



Tools not included

Tools not included

KA-2696

Magnet Tool Rack W/8pcs Hook

- Size: 310 mm (12.2") x 160 mm (6.3")
- 4 heavy duty magnets with durable rubber coating to prevent scuffing and scratching.
- 8- piece hooks and more than 177 square holes for easy arrangement.
- Attaching to any metallic surface.
- Organize tools easily.
- Capacity: 3 kg.



KA-2697

Magnet Tool Rack W/10pcs Hook

- Size: 450mm (17-3/4") x 228mm (9")
- 6 heavy duty magnets with durable rubber coating to prevent scuffing and scratching.
- 10- piece hooks and more than 78square holes for easy arrangement.
- Attaching to any metallic surface.
- Organize tools easily.
- Capacity: 6 kg.




Tools not included

KA-2698

Magnet Tool Rack W/15pcs Hook

- Size: 610 mm (24") x 152mm (6")
- 8 heavy duty magnets with durable rubber coating to prevent scuffing and scratching.
- 15- piece hooks and more than 87 square holes for easy arrangement.
- Attaching to any metallic surface.
- Organize tools easily.
- Capacity: 6 kg.





KT-V0013





Plastic Socket Organizer

This socket organizer is an ideal solution at workshop to help user to organize sockets. Ergonomic handle bar is made of steel. The socket stud is made of PP.

KT-V0011 150MM (Stud to be purchased separately)KT-V0012 200MM (Stud to be purchased separately)KT-V0013 250MM (Stud to be purchased separately)

Stud Available:

KA-STUD-1/4 1/4" STUD KA-STUD-3/8 3/8" STUD KA-STUD-1/2 1/2" STUD





Magnetic Aluminum Socket Holder Rail

- Easy storage your socket and keep them in order.
- Spring loaded ball bearings on each clip hold socket firm and secure.
- Strong magnet holds tool organizer onto your tool box and won't scratch due to thin foam protection.

Size	Length: 300mm with 12pcs Socket Clip	Length: 457mm With 16pcs Socket Clip
1/4"	KT-V0016A	KT-V0016B
3/8"	KT-V0017A	KT-V0017B
1/2"	KT-V0018A	KT-V0018B



KA-2694 (Straight)

Magnetic Socket Holder


- Magnetic tray with special step-style arrangement.
- Accommodate about 16-piece with the socket size from 1/4 ~ 3/8 Dr.
- Magnetic socket holder prevent socket from falling.
- Strong magnetic attach to any metallic surface firmly.
- Material: Steel with Power coating to prevent rust and chipping.
- Size: 280mm * 90mm (11" * 3-1/2") (L x W)
- Capacity: 1000 g (2.5 Lbs)
- Weight: 600 g



KA-2695 (Taper)











KA-2705T Magnetic T-Bar Holder

- Magnetic T-Bar holder is perfect for your working.
- The magnetic holder can accommodate more than 5 pieces T-Bars.
- Attach aside the tool cabinet and spare space. Bear up to 3kgs.
- Size: 6" (150mm) Length x 3-1/3"(85mm) Width
- Materials: Steel with powder coating
- Rubber: Protective rubber foot prevents damage

to valuable surfaces.













Powerful Neodymium magnetic seats

KA-2989 Multi-Function Magnetic Tool Holder

FUNCTION:

- 1. Organizes screwdrivers, sockets, wrenches, hammers, pliers and more in one place. (Hold up to 71 tools.)
- 2. Keep tools neat and in reach.
- 3. Easily extend width to 50cm (20") for more available space.
- 4. Our special magnets allow this patented design to carry up to 15 lbs by testing on 1mm thickness iron plate.
- Perfect for using in garages, workshops, manufacturing sites and wherever you need it.
- 6. Removable and portable design can carry tools to anywhere you want at the same time.








Powerful Neodymium magnetic seats



KA-7818 Magnetic Table

FUNCTION:

- 1. Can use as an extra table anywhere you want.
- 2. Magnetic seats can attract small items (i.e. sockets, bits, screws...etc.)
- 3. Hooks for holding wrenches, hammers...etc.
- 4. Perfect for using in garages, workshops, manufacturing sites and wherever you need it.
- 5. Easy to take down notes, testing reports with table design.
- Our special magnets allow this patented design to carry up to 15 lbs by testing on 1mm thickness iron plate
- 7. Removable and portable design can carry tools to anywhere you want at the same time.



KA-2914A Single Magnetic Tool Holder

ONE 450mm, Strip W/13pcs Magnets

KA-2914B Magnetic Tool Holder

L -- Type 450mm, Strip W/13pcs Magnets



Tools not included







KA-2703 Magnetic Glove/Tissue Dispenser Holder

- 4 powerful rubber covered magnets on the back of the glove/tissue dispenser
- Attaching onto any metallic surface
- 3 adjustable springs are designed to hold any sizes of glove/tissue boxes.
- Finished with power coating to prevent rust and chipping.
- Size: 254mm(10")H x 150mm(6")W x 95mm(3-3/4")D



Tools not included

KA-2704 Magnetic Glove/Tissue Dispenser Holder W/Side Tray & Screwdriver holder

- 4 powerful rubber covered magnets on the back of the glove/tissue dispenser
- Attaching onto any metallic surface
- 3 adjustable springs are designed to hold any sizes of glove/tissue boxes.
- Finished with power coating to prevent rust and chipping.
- Size of Glove/Tissue dispenser holder: 254mm(10")H x 150mm(6")W x 95"(3-3/4")D
- Size of Side Tray: 105mm(4-1/8") x 90mm (3-1/2") x 3-mm (1-1/4")
- Size of Screwdriver Holder: 76mm(3")L x 90mm (3-1/2")W x 30mm(1-1/4")D






KA-2705

Magnetic Air Impact Wrench & Socket Holder

- Professionally designed for placing impact wrench and sockets or any similar items.
- Capacity: 5 Kg
- This holder can be attached to any ferromagnetic metal surface such as Metal, Alloy containing iron, steel, cobalt and nickel.






KA-2706 Magnetic Spray Gun/Hose Holder

- Powerful cushioned magnets and rubber bumper prevent surface damage
- Hole up to 2 gravity feed spray gun an d2 air hoses at the time.
- No more bending over to pick up hose.



KA-2707 Y-Type Super Magnetic Hook

- A specially designed hook to hold air spray gun or any tool even clothes.
- Attaching to any ferromagnetic metal surface such as metal, alloy containing iron, steel, cobalt and nickel.
- Capacity: 1.5 kg
- Magnet: Heavy duty 2000 gauss permanent magnet (Diameter: 100mm(outer) x 30mm (inner) x thickness 12mm)
- Weight: 600g





- → High power magnet to hold the impact wrench & socket.
- Put on the tool chest or to pole lifter to hold the impact wrench.

KA-7660

Tool Hold With Two Magnetic Pad (Metal)

Capacity: 15 kgs

KA-7660P **Tool Hold With Two Magnetic Pad** (POLYA CETATE)

■ Capacity: 21kgs

Magnetic Holder For Impact Wrench (iron + iron oxide)

FUNCTION:

CAPACITY: 15kgs

- 1. This magnetic holder is designed for holding most pistol type impact wrenches and impact sockets.
- Special magnetic structure can firmly attach to ferric surface up to
- 3. The magnetic holder can easily hold one impact wrench, four impact sockets, and other tools, like screwdrivers.
- 4. With PE coating finishing, this magnetic holder is environmental compliance.
- Screw-holes design, you can screw the holder on nonferrous surface (two screws included).
- 6. Wire hook for organize air hoses or electric wire.



KA-2871 Simple Magnetic Impact Wrench Holder

■ Capacity: 2.7 kgs



KA-7660S All Plastic Magnetic Impact Wrench Holder


Capacity: 8.1kgs





KA-7660A **Side View Mirror Holder**

- Spray and dry odd-shaped trim and wing mirrors quickly and
- Fix trim to spray-aid and hand-hold to spray.
- Then fix to wall in spray-booth to dry using two strong magnets.









KA-5225-T Magnetic Round Dish With Tray

- Tray: diameter 150mm (6") x 30mm
- Stainless steel dish with plastic tray
- Magnetic field intensity: 1000~2000 gauss
- Magnetic metal dish for metal parts, and non- conductive tray for metal-less small parts.

Material:

- Tray: stainless steel
- Pad: Rubber
- Magnet: Permanent magnet
- Saucer: ABS





KA-5224-T Magnetic Rectangular Dish With Tray

- 240 mm X 143mm
- Stainless steel dish with plastic tray
- Magnetic metal tray for metal parts, and non- conductive tray for metal-less small parts.



KA-2589B Magnetic Bowl For Parts

- Plastic part bowl with magnet is excellent for storing or holding the easy-to-lose small parts.
- Great for garage work, engine work, household work...etc.
- Strong magnetic base is covered with rubber.
- Magnetic base is oil-resistant.
- Diameter: Φ 6" (150mm)







Vertical Magnetic Tool Tray

- Made of cold roll steel 0.80mm thickness.
- Protective rubber foot causes no damage on any surface.
- Special magnetic tray can be attached onto any metallic surface such as tool trolley or tool chest.
- An excellent helper for auto repairing or household works.
- Powder coating surface to prevent rust and chipping.

Item no.	SIZE (L x W x Depth)	CAPACITY
KA-2686T	150mm x 115mm x 31mm	800g
KA-2687T	190mm x 115mm x 31mm	1500g
KA-2688T	210mm x 115mm x 31mm	2000g
KA-2689T	240mm x 115mm x 31mm	2500g
KA-2690T	270mm x 115mm x 31mm	3000g
KA-2691T	310mm x 115mm x 31mm	3500g





KA-2692T Magnetic Two Way Tool Tray

- Made of cold roll steel 0.80mm thickness.
- Protective rubber foot causes no damage on any surface.
- Special magnetic tray can be attached onto any metallic surface such as tool trolley or tool chest.
- An excellent helper for auto repairing or household works.
- Powder coating surface to prevent rust and chipping.
- Special design for storing screwdriver.
- Size: 310mm X 115mm [12-1/5"(L) ~ 4-1/2" (W)]
- Capacity: 4000g (8.1 Lbs)
- Weigiht:950g





KA-2883 Round Plastic Magnetic Tray – Ø150mm (5-3/4")

Packing: sliding card

■ 30sets/ctn; 11/12kgs/1.7'



KA-2884 Magnetic Bowl & Rack ■ Material of black area : PP

Material of black area : PPRound plate : Stainless Steel

Packing: color box

■ 12set/ctn; 15.8/16.8kgs/1.8'



KA-2885 Magnetic Tool Holder

Size: 305*50*7mmPacking: sliding card

■ 12/inner/24/ctn; 15.5/16.5kgs/0.6'



KA-6332 Watch Type Magnetic Tray

W/4pcs Bits

When repairing parts, you can use this magnetic tray, help your working






Magnetic Tray

Material: Stainless steel

KA-6220A size: 330 x 250 x 25mm **KA-6210A** size: 240 x 140 x 30mm







* Tool not includes.

Retractable Magnetic Parts Tray KA-2091A KA-2091B KA-2091C

- With magnetic base for securing any metal parts.
- Holds bolts, nuts, nails and other small metal or non-metal objects.
- Can be used horizontally, vertically, upside down or hang on hook.
- Retractable design for easy to store in narrow space, such as tool bag, tool drawer...etc.

	KA-2091A	KA-2091B	KA-2091C
Top Ø	8-5/8" (225mm)	5-1/4" (134mm)	11-5/16" x 7-7/8" (278 x 200mm)
Bottom Ø	3-3/8" (86mm)	2" (51mm)	7-5/16" x 3-3/8" (185 x 85mm)
Max. Depth	5" (127mm)	3-1/2" (90mm)	2-3/4" (70mm)
Min. Depth	1-3/4" (43mm)	1-1/4" (31mm)	1-3/8" (36mm)
Folds	4	4	3
N.W.	14.8 oz (419g)	4.2 oz (120g)	22.2 oz (630g)
Shape	Round (large)	Round (small)	Oval









KA-3798 Magnetic Clamp

- Powerful magnetic base holds up to 5 lbs.
- Hands free for controlled spray painting.




KA-3798A Magnetic Base Paint Clamp

- Flexible shaft for controlled spray painting.
- Powerful magnetic base.
- Hands free for use on metal paint booth walls.



KA-3798B Soldering And Assembly Clamp

- Offers an extra pair of hands when soldering or assembling.
- Flexible design allows work to be held in a variety of positions.
- Magnetic base attaches to any ferrous surface.
- Hex shaped base allows use in a vise when required.





Plastic Wrench Rack

- Hold up wrench for easy size identification
- Can also hang on a wall or carry to job.

Item No.	Slot	Туре
KA-1379-12	12 pcs	Forward
KA-1379-15	15 pcs	Forward
KA-1379-12RV	12 pcs	Reverse



Stubby Wrench Rack

- Made from tough TPR plastic.
- Can also be hang on a wall or carry to job.
- Suitable for stubby wrench


Item No.	Slot
KA-1378-5	5 pcs
KA-1378-6	6 pcs
KA-1378-7	7 pcs
KA-1378-8	8 pcs
KA-1378-11	11 pcs
KA-1378-12	12 pcs



TPR Wrench Rack

- Made from tough TPR plastic
- Can also be hang on a wall or carry to job.
- Suitable for combination, geared, ring, open end and flare nut spanners.

Item No.	Slot	Туре
KA-1382	8 pcs	Forward
KA-1382-12	12 pcs	Forward
KA-1382-15	15 pcs	Forward
KA-1382-RV	8 pcs	Reverse
KA-1382-12RV	12 pcs	Reverse
KA-1382-15RV	15 pcs	Reverse

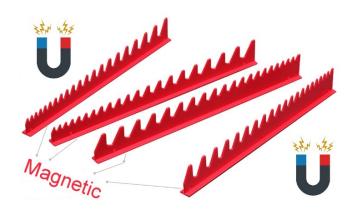

KA-1379 4pcs Magnetic Sharks Teeth Wrench Rack

- Durable composite sharks teeth spanner rack with magnetic strips, helps to maintain an organized topchest / rollcab.
- Easy to storage the wrenches, make them in order.
- $\,\blacksquare\,$ Suitable for combination wrench, double end wrench, double

open wrench and so on.

- Material: PP
- Content:

2pcs – Forward type.

2pcs - Reverse type







KA-1380 16 Slot Reversible Wrench Rack

- Material: ABS, PP
- Take up 30% more storage space.
- * Rail Detachable *



KA-1376 Metal Socket Tray Rack - 40pcs

- Organized classification sockets specification and placement.
- The surface uses a better texture power coating.
- With handle function, easy to carry tools to the workplace.
- The thin design of the socket tray can be placed in a low-height drawer of tool car or hanging on the wall

Capacity:

Hold up to 10pcs 1/4"DR. socket Hold up to 20pcs 3/8"DR. socket Hold up to 10pcs 1/2"DR. socket




KA-1377 Metal Socket Tray Rack - 80pcs

- Organized classification sockets specification and placement.
- The surface uses a better texture power coating.
- With handle function, easy to carry tools to the workplace.
- The thin design of the socket tray can be placed in a low-height drawer of tool car or hanging on the wall

Capacity:

Hold up to 20pcs 1/4"DR. socket Hold up to 30pcs 3/8"DR. socket Hold up to 30pcs 1/2"DR. socket



0° - 30° - 60° - 90° Adjustable Magnetic Socket Holder

- Adjustable Socket holder can be changed into 4 steps: 0°, 30°, 60° & 90° positions.
- Strong magnets let the socket holder stay on the toolbox or any metal surface firmly.
- High quality studs secure the sockets into a locked position, socket would not fall off or come loose.
- Durable Anti-Slip features with heavy-duty ABS.
- Size: 230 (L) X 70(H) mm
- Capacity: 1.2 kgs

KA-2695R12







KA-2695R14





3/8" Metal Socket Rail - Compact Type

- Mini Type/Easy to handle
- Keep the sockets in neat order.

	Stud	Size
KA-1400-S3808	8	3/8" x 185mm (L)
KA-1400-S3810	10	3/8" x 260mm (L)
KA-1400-S3812	12	3/8" x 300mm (L)



2PC/SET Magnetic Plastic Bottle

KA-1398R - Red Cap KA-1398B - Black Cap

- Each set contains 2 x Magnetic Plastic Bottle
- Capacity: 2 kg
- The picture shown the jar filled with bit is 2.6kg
- Magnetic Type: NdFeB Magnet (4 pcs)
- Material: PP (Lid), PET (Jar)
- Dimension: 140 x ø 94mm
- Led: H 17.5 x ø 93 x T2 mm
- Jar: H 138 x ø 93 \ x T2 mm
- Color: Red or Black lid with Transparent Jar.
- Package: 2 pcs/set/white box
- Logo can be printed with extra cost.
- MOQ: 100







HIGH-POWER Magnetic Pad - Hold your tools tight!









- High-Power, Rare Earth Magnets Hold The Tools and Parts Securely on any Ferrous Surface.
- Flexible Design is Easy to Lift and Move around in Workplace.
- Premium Carbon-Fiber-Like Outer Material Resists Punctures and Common Shop Fluids
- Hold The Lug Nuts, Hand Tools, other Daily-Use Items under the Hood or on the Lift Post.
- Material: PVC/NdFeB
- Patent-Pending.

KA-2797A Size: 51 x 51mm



KA-2797B Size: 114 x 114mm





KA-2797C

Size: 200 x 280mm

KA-2797CA Size: 200 x 280mm



KA-2797E Size: 200 x 200mm



KA-2798 Size: 240 x 248mm



KA-2797D Size: 350 x 50mm



KA-2717 Strong Magnetic Air Wrench Holder

High-Power but Lightweight!

- Securely holding various air wrenches and tools.
- The holder loading capacity: 2500g to 3000g,
- Strong magnetic (NdFeB) force ranging from 2000 to 2500 gauss.
- Material: iron metal with a surface vinyl coating.
- Dimension: 150*90*90mm
- Weighs: 470g.





Attaching to the side of steel work bench, the magnet is quickly and easily positioned or repositioned!


Holds your tools safely and securely.



Keep Air impact wrench & Power tool safe from damage and handy.

KA-2250 Multi-Magnetic Can Holder

- Universal magnetic holder for any lubricant or can.
- Hold any cans up to diameter: 2.6" (70mm) firmly & securely.
- Made of Durable Plastic and Strong Magnets let the holder attach to any ferrous metal surface.
- The Magnets are made with Protective Rubber Lining to prevent surface scratches.



- Capacity: hold up to 3000g (3 kg)
- 11 Colors to choose from.







Multi Magnetic Can Holder

- Special Design to Store Lubricants or any Can Bottles.
- Strong Magnet let the holder attach to any ferrous metal surface.
- Keep workspace tidy
- Size: (H) 5.7" X (W) 2.83" X (D) 3.3"
- Hold Container up to 2.60")70mm)
- Capacity: Load up to 3000 g (3 kg)

KA-2251S Silver KA-2251B Back



Multi Magnetic Can Holder



KA-2252B **Black**



KA-2253S Silver



KA-2253B **Black**





Kingtool co., Itd / Tien Chien Enterprises co., Ltd E-mail: info@autotool.com.tw


KA-1498 Tool Organizer for Tool Trolley Drawer

No more sweat in finding your tool in the tool trolley drawer!

- Introducing the versatile, easy to use tool organizer for your tool trolley!!
- Excellent for Ratchet, Spanner, Socket, Fastener...etc
- Keep your tool drawer very tidy. Organize your tools freely.
- Find your tool in split second
- Each grids holds the hex bit. Use it alone or with accessory studs/holders to hold socket, spanner...etc.

Specification:

- 6" x 6" (14 grids x 14 grids) tool board.
- Material : P.P.
- Color: Black
- Dimension: 152 x 152x10mm
- Each set contains 10 pcs tool board.
- Unit Package: White box
- Packing;10 sets/CTN/15/16Kg



Accessory for KA-1498:



Socket Stud / Socket Clip

- Twist Lock base design, No hassle to screw the studs.
- Material: P.P.
- Color: Red (185C)

KA-1498-A01-14 1/4" Stud KA-1498-A01-38 3/8" Stud KA-1498-A01-12 1/2" Stud

0 Unit set contains 25 pcs studs / packed in poly bag.



Rachet Drive Holder

- Hold the Rachet drive securely.
- Material: P.P.
- Color: Green (802C)


KA-1498-A03-14 1/4" Stud KA-1498-A03-38 3/8" Stud KA-1498-A03-12 1/2" Stud

0 Unit set contains 5 pcs studs/ packed in poly bag.



KA-1498-A04 Tool Handle Holder

- Hold the Rachet Handle, Screwdriver, Spanner
- Material: P.P.
- Color: Green (802C)
- Unit set contains 10 pcs holder/ packed in poly bag.



KA-1498-A05 Plier Holder

- Hold the Pliers and other tools
- Material: P.P.
- Color: Green (802C)
- Unit set contains 10 pcs holder/ packed in poly bag.



7.2cm

Magnetic Cordless Power Tool Holder (Holds up to 5000 g)

- Cordless Power Tool Holder: Wider & Long legs to hold the battery securely!
- Super Powerful, Strong Grip: Magnetic force from 2000 to 2500 gauss
- Capacity: Hold up to 5kg (11lb). Great to Impact Wrench and Cordless Power Tool.
- Size: 140mm x 100mm x 95mm
- Weight: 580g
- Made of Iron metal with vinyl coating.

Many colors to choose from:

KA-2740Y Yellow
KA-2740T Orange
KA-2740R Red
KA-2740E Blue
KA-2740G Green
KA-2740A Grey











Features:

- Ten year warranty
- Industrial-level bench vise
- 360° Swivel base
- Made of FCD 45 spheroidal graphite iron castings
- Precise with strong clamping force
- Hardness of vise jaw HRC 25° ~ HRC 30°
- Equipped with anvil
- Finished with back paint

Specifications

Model	size	Packing	Jaw opening	Throat depth	N.W. (kg)	G.W. (kg)	CUFT
KCT-101-4	4"	1PC/CTN	4"	2-5/8"	12.2	12.7	0.43'
KCT-101-5	5"	1PC/CTN	5"	3-1/4"	16	16.7	0.6'
KCT-101-6	6"	1PC/CTN	6"	3-3//4"	21.5	22.4	0.82'
KCT-101-8	8"	1PC/CTN	8"	4"	29.2	30.2	0.97'



Features:

- Ten year warranty
- Industrial-level bench vise
- 360° Swivel base
- Made of SC37 cast carbon steel
- Equipped with anvil and pipe jaw
- Hardness of vise jaw HRC 25° ~ HRC 30°
- Finished with back paint

Specifications

Model	size	Packing	Jaw opening	Throat depth	N.W. (kg)	G.W. (kg)	CUFT
KCT-102-3	3"	1PC/CTN	3"	2"	4.5	6	0.2'
KCT-102-4	4"	1PC/CTN	4"	2-1/4"	7.5	8.3	0.4'
KCT-102-5	5"	1PC/CTN	5"	2-5/8"	11	12	0.6'
KCT-102-6	6"	1PC/CTN	6"	3"	14.5	16	0.8'
KCT-102-8	8"	1PC/CTN	8"	3-1/2"	20.5	22	1.2'
KCT-102-10	10"	1PC/CTN	10"	4"	25.6	28	1.5'



K-Type Machine Vise

Specifications

Model	size	Packing	Jaw opening	Throat depth	N.W. (kg)	G.W. (kg)	CUFT
KCT-103-4	4"	1PC/CTN	4"	1-3/16"	9	10	0.24'
KCT-103-6	6"	1PC/CTN	6"	1-9/16"	25	26	0.97'
KCT-103-8	8"	1PC/CTN	8"	2-1/4"	57	60	2.4'



Precision Angle Lock Machine Vise

Specifications

opodinoaciono							
Model	size	Packing	Jaw opening	Throat depth	N.W. (kg)	G.W. (kg)	CUFT
KCT-104-4	4"	1PC/CTN	4"	1-3/16"	19	20	0.47'
KCT-104-6	6"	1PC/CTN	6"	1-9/16"	40	41	15'
KCT-104-8	8"	1PC/CTN	8"	1-15/16"	76	80	2.9'







Home Vise

Features:

- Made of FC25 iron castings
- 260° Swivel base
- Equipped with anvil or pipe jaw

Specifications

Model	size	Packing	Jaw opening	Throat depth	N.W. (kg)	G.W. (kg)	CUFT
KCT-105-312	3-1/2"	6PC/CTN	3-1/2"	2"	28	30	1.1'
KCT-105-4	4"	2PC/CTN	4"	2"	9.6	10	0.4'

Clamp-on Vise

Features:

- Made of FC iron castings and can be fixed on the desk
- Made of Aluminum alloy and can be fixed on the desk

Specifications

Model	size	Packing	Jaw opening	N.W. (kg)	G.W. (kg)	CUFT
KCT-106-3	3"	10(36)PC/CTN	2"	9	9.5	1.2'
KCT-106-3A (aluminum)	3"	36PC/CTN	2"	16	17	3'



Table Vise With Suction Base

Features:

- Made of aluminum alloy castings
- A sucker base attached
- Structured with a spherical body for angle changes

Specifications

Model	size	Packing	Jaw opening	N.W. (kg)	G.W. (kg)	CUFT
KCT-109-3	3"	4PC/CTN	2-12"	4	5	0.5'



Drill Press Cross Vise

Specifications

Model	size	Packing	Jaw opening	Longitudinal Travel	N.W. (kg)	G.W. (kg)	CUFT
KCT-111-3	3"	1PC/CTN	2-3/4"	5"	6.2	7	0.31'
KCT-111-4	4"	1PC/CTN	3-3/4"	6"	10	11	0.44'
KCT-111-5	5"	1PC/CTN	4-3/4"	7"	13.5	15	0.5'
KCT-111-6	6"	1PC/CTN	5-3/4"	8"	16.5	18	0.65
KCT-111-8	8"	1PC/CTN	7-3/4"	10"	30	32	1.2'



All Steel Bench Vise

Features:

- KCT-201 Made of 100% steel
- No concern of body breakage
- Vise jaw is thermal treated with hardness of HRC C25° ~ HRC30°
- 360° Swivel base

Specifications

Model	size	Packing	Jaw opening	Throat Depth	N.W. (kg)	G.W. (kg)	CUFT
KCT-201	6"	1PC/CTN	7"	2-5/8"	12	13	0.8'





Forged Bench Vise

Features:

- Made of 100% steel plate
- High Clamping force
- No concern of breakage within 10 years
- Equipped with pipe jaw and anvil
- 360° Swivel base
- Vise jaw is thermal treated with hardness of HRC C25° ~ HRC30°

Specifications

Model	size	Packing	Jaw opening	N.W. (kg)	G.W. (kg)	CUFT
KCT-202-4	4"	1PC/CTN	4"	4.5	5	0.3'
KCT-202-5	5"	1PC/CTN	5"	5.7	6.2	0.4'
KCT-202-6	6"	1PC/CTN	6"	12.8	13.5	0.6'
KCT-202-7	7"	1PC/CTN	7"	26.8	28	1.2'



Drill Press Vise

Specifications

Model	size	Packing	Jaw opening	Throat Depth	N.W. (kg)	G.W. (kg)	CUFT
KCT-203-3	3"	8PC/CTN	2-3/4"	3/4"	16	18	0.75'
KCT-203-4	4"	6PC/CTN	4"	1"	18	20	0.79'
KCT-203-5	5"	4PC/CTN	5"	1"	20	22	0.71'
KCT-203-6	6"	3PC/CTN	5-1/2"	1"	19.2	21	0.62'



Reed Bench Vise

Features:

- Made of FC25 gray iron castings
- Precise with high clamping force

Specifications

	Model	size	Packing	Jaw opening	N.W. (kg)	G.W. (kg)	CUFT
KC	T-401-4	4"	1PC/CTN	4"	13.4	14.2	0.65'
KC	T-401-5	5"	1PC/CTN	5"	17.4	18.1	0.78'
KC	T-401-6	6"	1PC/CTN	6"	24.8	25.6	1.18'



Gray Iron Casting Bench Vise

Features:

- Made of FC25 gray iron castings
- 360° Swivel base
- Equipped with anvil

Specifications

Model	size	Packing	Jaw opening	Throat Depth	N.W. (kg)	G.W. (kg)	CUFT
KCT-501-4	4"	4PC/CTN	4"	2-3/8"	13.4	14.2	0.65'
KCT-501-5	5"	2PC/CTN	5"	2-3/4"	17.4	18.1	0.78'
KCT-501-6	6"	1PC/CTN	6"	3-1/8"	24.8	25.6	1.18'





KA-MJ300 Micro-Jet

- powered by normal disposable/ refillable lighter
- Instant 1300°C/2400°F micro torch flame
- Auto-ignition
- Pocket size



Specifications:

Outer body measure	(H) 110mm x (W) 65mm x (L) 25mm
Weight	60 g
Fuel	RC-30 refill cartridge, disposable lighter or similar product except child proof's
Hours of use	Approx. 20 minutes per disposable lighter
Flame temperature	1300°C blue flame

Features:

- Piezo electronic ignition system-with safety lock.
- Power by RC-30 refill cartridge or disposable gas lighter. Inexpensive and readily available.
- Flame temperature up to 1300°C (2500°F)
- Wind-Proof flame and waterproof ignition make the Micro-Jet ideal for camping and outdoor use.
- Compact size allows the unit to fit easily into any first aid/survival kit or tool kit.


How to use:

- Remove the upper body, then place the disposable gas lighter into the main body. Then, slide the two halves of the body back together. (refer to the figure)
- Switch the safety lock to the unlocked position. Then, slowly press the ignition button to the maximum point. Your MICRO-JET is now fired up and ready to use. (Note: if no flame appears, adjust the regulator on the disposable lighter and press the ignition button again.) As the gas in the lighter is consumed, the regulator will need to be adjusted periodically to ensure a proper flame.
- When the ignition button is released, there will be a short delay before the flame is completely extinguished.
- When the MICRO-JET is not use, remove the disposable gas lighter. (Or refill cartridge)

Warnings:

- Read instructions before use.
- Only use our RC-30 refill cartridge, disposable gas lighter or similar product.
- Do not ignite or use near an open flame, heater, furnace, or combustible material.
- Do not touch the nozzle cover during use, or before sufficient time has passed for cooling.
- Always be sure the unit is cool, and the lighter removed, before storing.
- Store properly when not in use, switch the safety lock to the locked position, keep in a dry place, out of the reach of children.
- Do not attempt to readjust or repair. The MICRO-JET unit is not user serviceable.
- Do not use continuously for more than five (5) minutes.

Caution: The torch flame is almost invisible in daylight, or in strong light.





* Colors: black, red, yellow, blue *

KA-PT200 Pro-Torch

- Butane Powered
- Child resistant automatic ignition system

The KA-PT200 Pro-Torch features an adjustable high BTU output flame.

The body, constructed of hi-tech polymers provides a sturdy yet lightweight feel and the internal brass and ceramic parts ensure precision operation and long life.

Use this affordable tool in the shop, lab, kitchen, garage or wherever a reliable butane torch is required.

Specifications:

Ψ	Decirications.					
	Dimension	Н	139mm (5.5")			
		L	101mm (4.0")			
		Grip Dia	34mm (1.34")			
		Base	61mm (2.4")			
	Weight (w/o fuel)		145g (empty)			
	Fuel		Butane			
	Torch		1300°C (2400°F)			
	Hours of nonstop burning		60 minutes (mid. setting)			
	Gas container capacity		20 ml			
	Flame Temperature		1300°C (blue flame)			



Features:

- State of the art waterproof piezo electronic ignition system. Up to 90 minutes use on each filling. Powerful wind-resistant flame.
- Compact size with ergonomic grip.
- Child-resistant ignition for safety.
- Easily refilled with any brand of butane gas.
- Flame adjustment for any size job.

Instructions:

- A. Prior to initial use, fill torch with butane fuel as described below.
- B. To fill gas tank, turn unit upside down and firmly push the butane can nozzle into the filling valve (fig.D)
- **C.** To ignite the torch:
 - 1. Slide the gas regulator lever to the "ON" position (fig.A)
 - 2. Rotate the igniter button slightly to the left (counterclockwise) to release the childproof lock (fig.B)
 - 3. The flame can then be adjusted by sliding the regulator lever.
- D. To shut off the torch, simply move the regulator lever to the far left and until you feel or hear it click into the lock-off position.









Warnings:

- Do not touch flame guard while in use or until sufficient time has passed for cooling.
- Do not immerse heated parts or items in water, allow to cool naturally.
- Use only butane gas in the torch. Do not use propane gas or any other types of fluids.
- Do not store in a temperature exceeding 40°C / 104°F
- Keep away from eyes at all times.
- Keep this unit out of the reach of children.
- The flame of the torch is nearly invisible in bright light or sunlight.
- Make sure that gas flow is turned off when not in use.





* Colors: black, red, yellow, blue *

KA-PT500 Pro-Torch

■ Heavy duty, stable flame, ergonomic grip

The heavy duty KA-PT500 provides the most powerful and stable butane flame available for demanding jobs where the highest BTU output is required. Its precision orifice and controls offer the best there is in a high output butane tool.

The ergonomic grip makes using the KA-PT500 comfortable at most any angle.

KA-PT500 was designed with features to withstand the rigors of daily professional use.

Specifications:

ecinications.					
	Н	177mm (7.0")			
Dimension	L	120mm (4.73")			
	Grip Dia	45mm (1.78")			
	Base	65mm (2.56")			
Weight (w/o	fuel)	460g (empty)			
Fuel		Butane			
Torch		1350°C (2500°F)			
Hours of nons op burning Gas container capacity Flame Temperature		200 minutes (mid. setting)			
		60 ml			
		1350°C (blue flame)			



Features:


- State of the art waterproof piezo electronic ignition system.
- Large fuel tank for 200 minutes use on each filling.
- Powerful high output wind-resistant flame.
- Ergonomic designed comfortable grip.
- Angled nozzle to properly direct flame.
- Easily refilled with any brand of butane gas.
- Flame adjustment for the most demanding applications.


Instructions:


- A. Prior to initial use, fill torch with butane fuel as described below.
- B. To fill gas tank, turn unit upside down and firmly push the butane can nozzle into the filling valve (fig.C) The tank should be filled in approximately ten seconds.

Please allow a few minutes after filling for the gas to stabilize.

- C. To ignite the torch:
 - 1. Rotate the gas control knob counterclockwise(left) till hear the gas flow sound.
 - 2. Depress the igniter button (fig.B) to ignite.
 - 3. The flame size can then be adjusted by rotating the gas control knob (fig.A) in either direction.
 - 4. The flame temperature may be adjusted by rotating the Air control ring.
- D. To shut off the torch, simply rotate the gas control knob fully clockwise (right.).








Warninge

- Do not touch flame guard while in use or until sufficient time has passed for cooling.
- Do not immerse heated parts or items in water, allow to cool naturally.
- Use only butane gas in the torch. Do not use propane gas or any other types of fluids.
- Do not store in a temperature exceeding 40° C / 104° F
- Keep away from eyes at all times.
- Keep this unit out of the reach of children.
- The flame of the torch is nearly invisible in bright light or sunlight.
- Make sure that gas flow is turned off when not in use.







KA-PRO120



KA-PRO120K

(contents: KA-PRO120, Solder, Sponge, PS-14, PS-9, PS-10, PS-3)

Soldering Iron Kit

KA-PRO120 KA-PRO120K

- Power range: 30W ~ 125W
- Automatic igniting
- Portable model, multi-function heat tool
- Butane Powered
- Bold ergonomic design

Features:

- Equivalent to a power range 30-125watt.
- Cordless, simple, safe operation anywhere.
- Ready to use 15 seconds after ignition.
- Tank contains fuel for 120 minutes of operation.
- No cords, can be used anywhere.
- No electrical interference.
- Comes with soldering tip and protective cap.

Specifications:

Length:	w/cap	254mm (10")
Lengin.	w/soldering tip	245mm (9.7")
Weight(wh	nen gas-filled)	166g
Approxima soldering	•	250~550°C (480~1000°F)
Torch		1300°C (2400°F)
Gas conta	iner capacity	12 ml
Operating (one gas f		100 min At mid setting

Applications:

Automotive and truck repairs, Aviation service and repair, Electrical components, Environmental splicing, Field repairs, Insulated solder preform, Jewelry repair, Loosen rusted nuts and bolts, Maintain switch panels, Repair television sets, meters, switch boards, sensitive IC boards, shrink tubing, silver solder, soften window caulking, Solder circuit boards, TV cable systems, Weld plastics.


Option accessories: the accessories listed below are available

Parts N	0.	Description	Туре
	PS-1	1.6mm soldering tip	Conical
	PS-2	3.2mm soldering tip	Conical
	PS-3	2.4mm soldering tip * KA-PRO120K includes	Chisel
	PS-4	3.2mm soldering tip	Chisel
	PS-5	2.4mm soldering tip	Angle

Parts NO.		0.	Description	Type
PS-		PS-6	3.2mm Soldering tip	Angle
PS-9		PS-9	Hot Knife * KA-PRO120K includes	
		PS-10	Heat Blower * KA-PRO120K includes	
		PS-14	Orifice Assembly * KA-PRO120K includes	
		S-30	Deflector	

How to changing tips:

- 1. Be sure the tip has cooled before removal.
- 2. The catalyst seen through the hot air exhaust hole of the soldering tip is very delicate and will not sustain mechanical abuse without serious damage.
- 3. The soldering tip is easily removable allowing the installation of other style tips or the replacement of a worn tip. After the soldering tip is cool, simply unscrew it with a counterclockwise motion. Be careful not to over-tighten as this could damage the nozzle assembly and thread in the body.







KA-PRO150KB (contents: KA-PRO150, Solder, Sponge, PS-14, S-30, PS-10, PS-4, LEC (liquid energy cell))

Soldering Iron Kit

KA-PR0150 KA-PR0150KB

- Power range: 30W ~ 125W
- Automatic igniting
- Portable model, multi-function heat tool
- Butane powered with removable refillable LEC (liquid energy cell)

Features:

- Equivalent to a power range 30-125watt.
- Cordless, simple, safe operation anywhere.
- Ready to use 15 seconds after ignition.
- Patented LEC removable fuel cell for uninterrupted use, safety & reliability even at very low temperatures. LEC refills easily with any brand of butane fuel. LEC filters butane for no-clog operation.
- Disposable LECs available. Integrated stand for safety and hands free use.
- May be legally transported on commercial airlines (without LEC)
- No electrical interference.
- Comes with soldering tip and protective cap.

Specifications:

opcomodions.					
Length:	w/cap	254mm (10")			
	w/soldering tip	245mm (9.7")			
Weight(wh	nen gas-filled)	240g			
Approxima soldering	ate temperature tip	250~550℃ (480~1000°F)			
Torch		1300°C (2400°F)			
Gas conta	iner capacity	20 ml			
Operating (one gas f		30 min At mid setting			

Applications:

Automotive and truck repairs, Aviation service and repair, Electrical components, Environmental splicing, Field repairs, Jewelry repair, Loosen rusted nuts and bolts, Maintain switch panels, Repair television sets, meters, switch boards, sensitive IC boards, shrink tubing, silver solder, soften window caulking, Solder circuit boards, TV cable systems


Option accessories: the accessories listed below are available

Parts NO.		Description	Туре
	PS-1	1.6mm soldering tip	Conical
	PS-2	3.2mm soldering tip	Conical
	PS-3	2.4mm soldering tip	Chisel
	PS-4	3.2mm soldering tip * KA-PRO150KB includes	Chisel
	PS-5	2.4mm soldering tip	Angle

Parts NO.		0.	Description	Туре
		PS-6	3.2mm Soldering tip	Angle
		PS-9	Hot Knife	
		PS-10	Heat Blower * KA-PR0150KB includes	
		PS-14	Orifice Assembly * KA-PRO150KB includes	
		S-30	Deflector * KA-PR0150KB includes	


How to changing tips:

- 1. Be sure the tip has cooled before removal.
- 2. The catalyst seen through the hot air exhaust hole of the soldering tip is very delicate and will not sustain mechanical abuse without serious damage.
- 3. The soldering tip is easily removable allowing the installation of other style tips or the replacement of a worn tip. After the soldering tip is cool, simply unscrew it with a counterclockwise motion. Be careful not to over-tighten as this could damage the nozzle assembly and thread in the body.







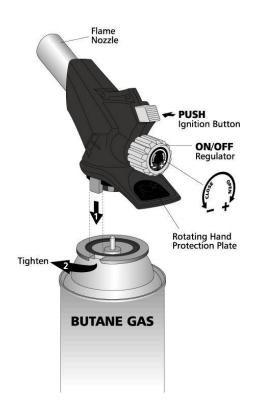



KA-PT600A PRO-Torch

- Automatic ignition propane
- Powered pro-torch

The heavy duty KA-PT600A type provides the most powerful and stable propane flame available for demanding jobs where the highest BTU output is required. Its precision orifice and controls offer the best there is in a high output propane tool. The rotating hand protection plate makes using the KA-PT600A comfortable at most any angle.

KA-PT600A was designed with features to withstand the rigors of daily professional use.

Features:

- Powerful wind-resistant flame.
- Patented rotating hand protection plate for safe use at any angle.
- High output flame for plumbing and other heavy duty jobs at home and in the workplace.
- Use safely at any angle.

Specifications:

	H(w/o stand)	138mm (5.4")
Dimension	L	100mm (3.9")
	W	36mm (1.4")
Weight (when	gas-filled)	280 g
Torch		1300 °C (2400°F)
Gas containe	r capacity	60 ml
Operation cap (one gas fillin	•	120min. At mid setting

Applications:

Brazing, soldering, plumbing, BBQ grill charcoal starter, tool and die shops, automotive and truck repairs, industrial maintenance

Instructions:

- A. Connect KA-PT600A to Butane Canister by pushing down and turning clockwise (right) until it stops. Be sure to align butane output valve with torch input valve.
- B. To ignite, turn regulator knob counterclockwise (left) approximately 1/4 turn to start the gas flow and then push ignition Button. You may have to push ignition button more than once depending on conditions.
- C. Rotate regulator knob to the LEFT for higher flame or to the RIGHT for lower flame.
- D.If using the torch upside down, the flame may continue to burn for 10 seconds after turning off gas.
- E. When replacing or disconnecting the butane canister, make sure that the regulator knob is tight in the OFF (right) position to avoid leaking.
- F. Disconnect torch from cylinder when not in use.
- G. Within 2 minutes of ignition, the flame may appear red. During this time the torch should only be used in an upright position. After 2 minutes of preheating the torch may be rotated to any angle.

Warning:

- Only use the torch in a well-ventilated area.
- Carefully follow the instructions and warnings and familiarize yourself with the torch before use. Failure to follow these instructions could cause property damage, personal injury or death.
- Be aware that the tip of the torch can get extremely hot during or after use. Keep the torch away from children. Do not touch the torch nozzle after use.
- Never connect to a fuel cylinder near any flammable materials, chemicals, liquids or gases.
- Always point the torch flame away from the flammable objects or materials (such as walls, ceilings...etc.) Be especially careful around any gasoline and fuel products.
- Never storage the value body with the combustible material.



PUSH Ignition Button ON/OFF Regulator Tighten Rotating Hand Protection Plate



KA-PT600E PRO-Torch (European Type)

- Automatic ignition propane
- Powered pro-torch

The heavy duty KA-PT600E type provides the most powerful and stable propane flame available for demanding jobs where the highest BTU output is required. Its precision orifice and controls offer the best there is in a high output propane tool. The rotating hand protection plate makes using the KA-PT600E comfortable at most any angle.

KA-PT600E was designed with features to withstand the rigors of daily professional use.

Features:

- Powerful wind-resistant flame.
- Patented rotating hand protection plate for safe use at any angle.
- High output flame for plumbing and other heavy duty jobs at home and in the workplace.
- Use safely at any angle.

Specifications:

	H(w/o stand)	138mm (5.4")			
Dimension	L	100mm (3.9")			
	W	36mm (1.4")			
Weight (when	gas-filled)	280 g			
Torch		1300°C (2400°F)			
Gas containe	r capacity	60 ml			
Operation cap (one gas filling	,	120min. At mid setting			

Applications:

Brazing, soldering, plumbing, BBQ grill charcoal starter, tool and die shops, automotive and truck repairs, industrial maintenance

Instructions:

- A. Connect KA-PT600E to propane canister by screwing down until it tightens.
- B. To ignite, turn regulator knob counterclolckwise (left) approximately 1/4 turn to start the gas flow and then push ignition button. You may have to push ignition button more than once depending on conditions.
- C. Rotate regulator knob to the LEFT for higher flame or to the RIGHT for lower flame.
- $\mbox{D.If}$ using the torch upside down, the flame may continue to burn for 10 seconds after turning off gas.
- E. When replacing or disconnecting the propane canister, make sure that the regulator knob is tight in the OFF (right) position to avoid leaking.
- F. Disconnect torch from cylinder when not in use.
- G. Within 2 minutes of ignition, the flame may appear red. During this time the torch should only be used in an upright position. After 2 minutes of preheating the torch may be rotated to any angle.

Warning:

- Only use the torch in a well-ventilated area.
- Carefully follow the instructions and warnings and familiarize yourself with the torch before use. Failure to follow these instructions could cause property damage, personal injury or death.
- Be aware that the tip of the torch can get extremely hot during or after use. Keep the torch away from children. Do not touch the torch nozzle after use.
- Never connect to a fuel cylinder near any flammable materials, chemicals, liquids or gases.
- Always point the torch flame away from the flammable objects or materials (such as walls, ceilings...etc.) Be especially careful around any gasoline and fuel products.
- Never storage the value body with the combustible material.